



上海交通大学
SHANGHAI JIAO TONG UNIVERSITY



上海交通大学
约翰·霍普克罗夫特
计算机科学中心

John Hopcroft Center for Computer Science

CS3317: Artificial Intelligence

Shuai Li

John Hopcroft Center, Shanghai Jiao Tong University

<https://shuaili8.github.io>

<https://shuaili8.github.io/Teaching/CS3317/index.html>

Part of slide credits: CMU AI & <http://ai.berkeley.edu>

Self introduction

- Position
 - Assistant Professor at John Hopcroft Center since Aug 2019
- Education
 - PhD in Computer Science from the Chinese University of Hong Kong
 - Master in Math from the Chinese Academy of Sciences
 - Bachelor in Math from Chu Kochen Honors College, Zhejiang University

How am I related to AI



- Research interests
 - Bandit algorithms
 - Reinforcement learning algorithms
 - Machine learning theory
 - Recommendation systems
- Have published 35+ papers on top AI conferences ICML/NeurIPS/...
- Also top reviewers for these conferences NeurIPS/UAI/...
- Was recipient of Google PhD Fellowship award in the field of Machine Learning 2018

Teaching assistant

- Zhihui Xie (谢知晖)
 - Email: fffffarmer@sjtu.edu.cn
 - 2nd year Master student
 - Research on causal machine learning and recommendation systems
 - Office hour: Wed 7-9 PM
- Fang Kong (孔芳)
 - Email: fangkong@sjtu.edu.cn
 - 3rd year PhD student
 - Research on bandit and reinforcement learning algorithms
 - Office hour: Thu 7-9 PM
- Xu Liu (刘旭)
 - Email: liu_skywalker@sjtu.edu.cn
 - 1st year Master student
 - Research on machine learning and reinforcement learning
 - Office hour: Tue 6-8 PM

References (will add more during course)

- Artificial Intelligence: A Modern Approach by Stuart Russell and Peter Norvig (4th edition)
- Reinforcement Learning: An Introduction by Richard S. Sutton and Andrew G. Barto
- 周志华 《机器学习》 清华大学出版社，2016.

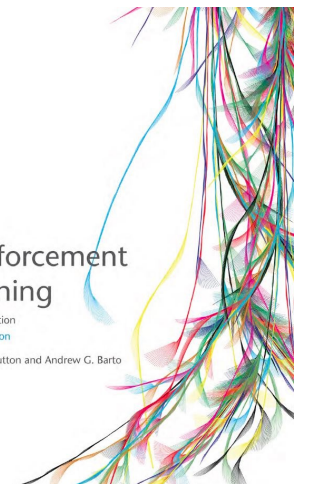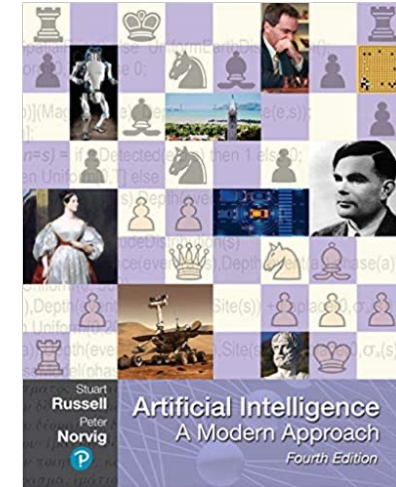

Goal

- Know what is AI and what it usually covers
- Be familiar and understand popular AI problems and algorithms
- Be able to build AI models in applications
 - Know which algorithms to adopt and when to adopt
- Get a touch of latest research

Prerequisites

- Basic computer science principles
 - Big-O notation
 - Comfortably write non-trivial code in Python/numpy
- Probability
 - Random Variables
 - Expectations
 - Distributions
- Linear Algebra & Multivariate/Matrix Calculus
 - Gradients and Hessians
 - Eigenvalue/vector

Grading

- Attendance and participation: 5%
- Homework (written & programming) 40%
- Project: 25%
- Final exam: 30%

Honor code

- Discussions are encouraged
- **Independently** write-up homework and code
- Same reports and homework will be **reported**

Course outline


- Search
- Constraint satisfaction problems
- Game trees
- Markov decision processes (MDPs)
- Reinforcement learning
- Bandit algorithms
- Hidden Markov models (HMMs)
- Bayes nets
- Machine learning basics

What is AI?


What is AI?

The science of making machines that:


Think like people

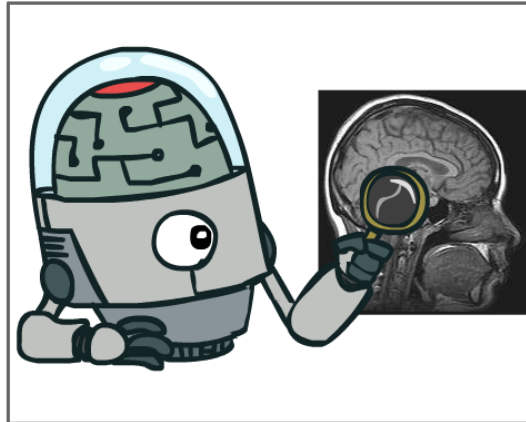


Think rationally

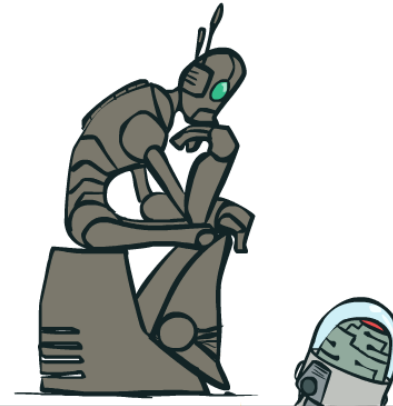

Act like people

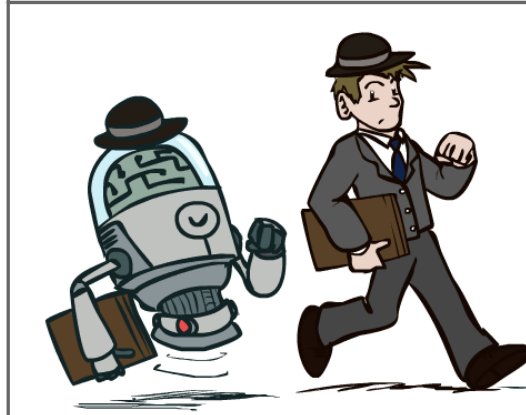


Act rationally

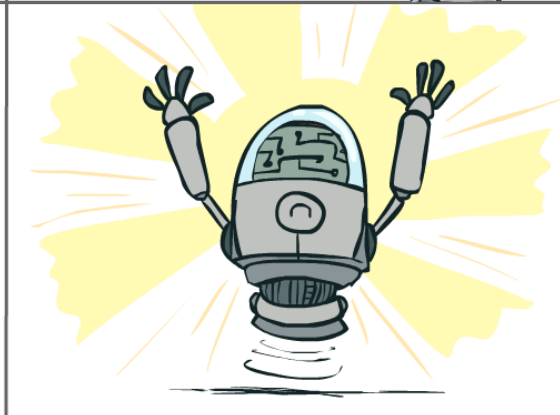




Acting humanly: The Turing test approach

- In 1950, Turing defined a test of whether a machine could perform
- Practically though, it is a test of whether a machine can ‘act’ like a person
- “A human judge engages in a natural language conversation with one human and one machine, each of which tries to appear human. If judge can’t tell, machine passes the Turing test”

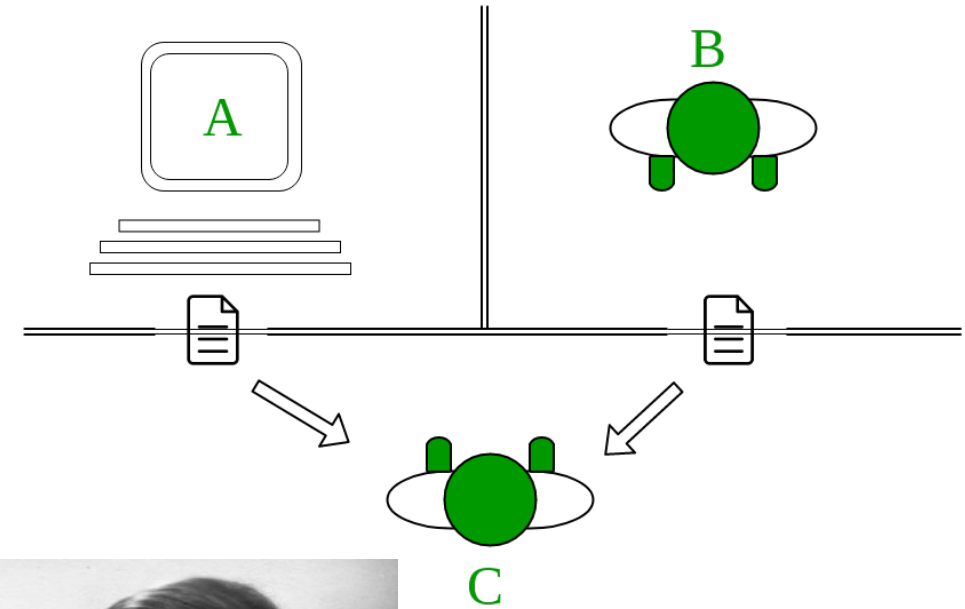


Acting humanly: The Turing test approach 2

- The computer would need to possess the following capabilities
 - **Natural language processing** to enable it to communicate successfully in languages
 - **Knowledge representation** to store what it knows or hears
 - Automated reasoning to use the stored information to answer questions and to draw
 - Machine learning to adapt to new circumstances and to detect and extrapolate patterns
- Total Turing test includes a video signal, so the computer will need
 - Computer vision to perceive objects
 - **Robotics** to manipulate objects and move about

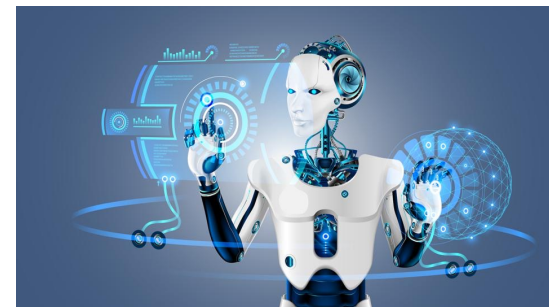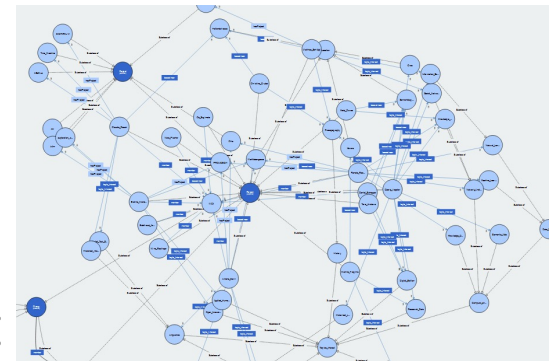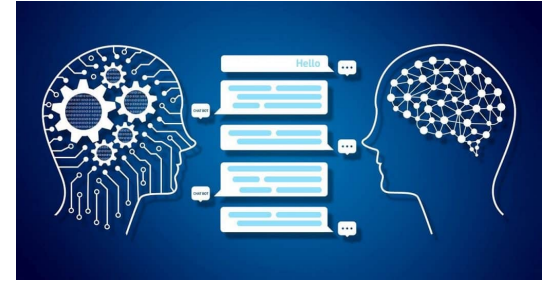

Thinking humanly: The cognitive modeling approach

- The interdisciplinary field of **cognitive science** hopes to construct precise and testable theories of the human mind
- Real cognitive science is necessarily based on experimental investigation of **actual humans** or animals
- In the early days of AI, people think that an algorithm performs well on a task \Leftrightarrow it is a good model of human performance

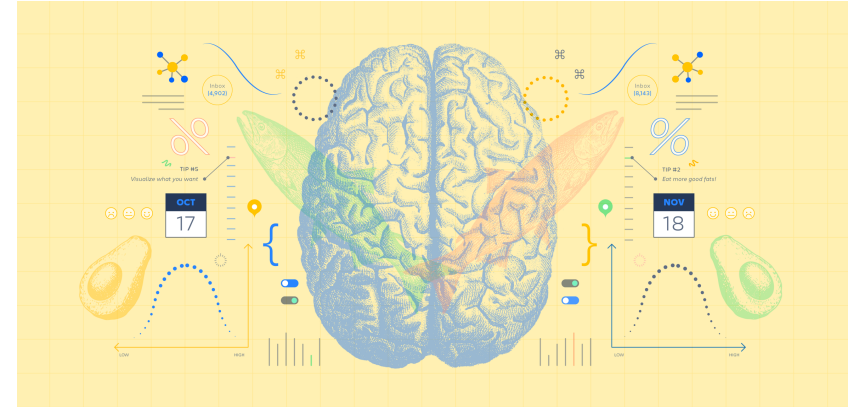


What about the Brain?

- Brains (human minds) are very good at making rational decisions, but not perfect
- Brains aren't as modular as software, so hard to reverse engineer!
- “Brains are to intelligence as wings are to flight”
- Lessons learned from the brain: memory and simulation are key to decision making




Thinking rationally: The “laws of thought” approach

- The Greek philosopher Aristotle, syllogisms (三段论)
- The logicians hope to build on logic systems to create intelligent systems
- The emphasis was on **correct inferences**

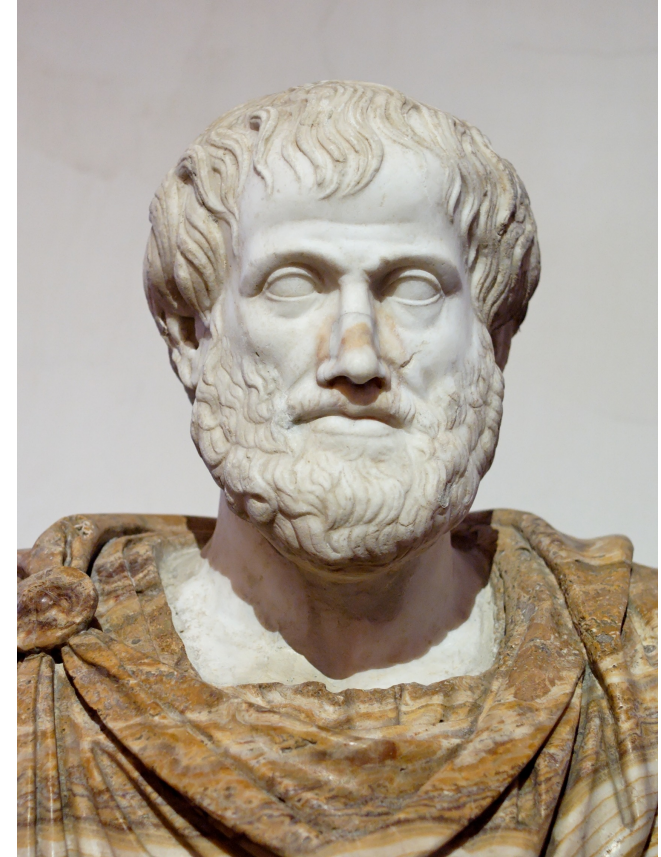

Acting rationally: The rational agent approach


- Making correct inferences is sometimes *part* of being a rational agent, but not *all*
- A **rational agent** is one that acts so as to achieve the **best** expected outcome
- Advantages
 - It is more general than “thinking rationally”
 - It is more amenable than “thinking/acting humanly”

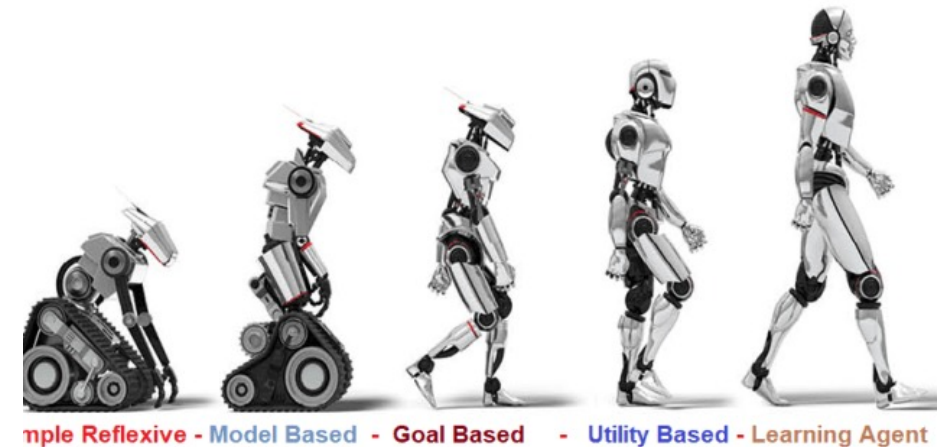


What is AI?

The science of making machines that:


A: Think like people

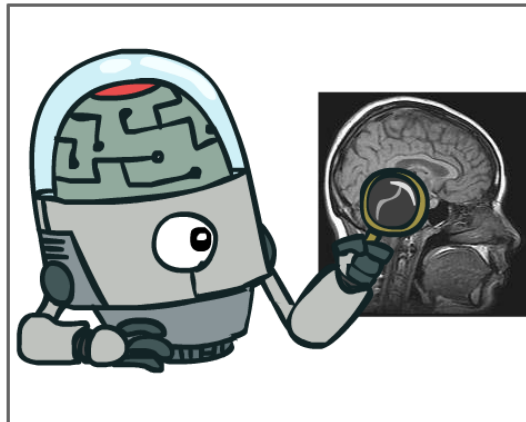


C: Think rationally

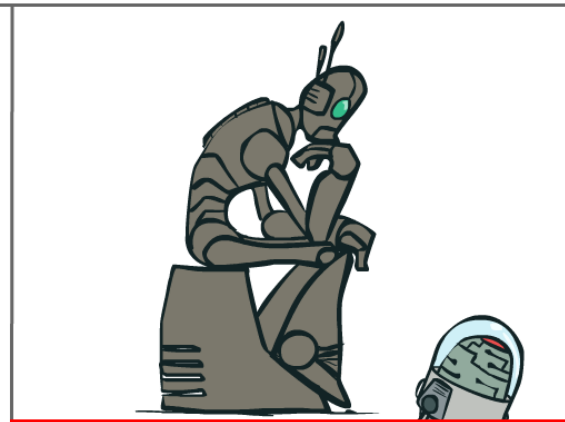


B: Act like people

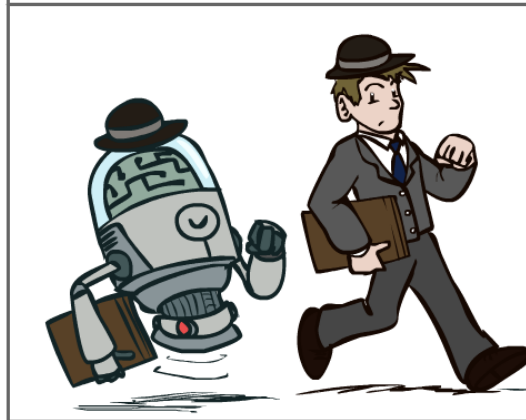

D: Act rationally

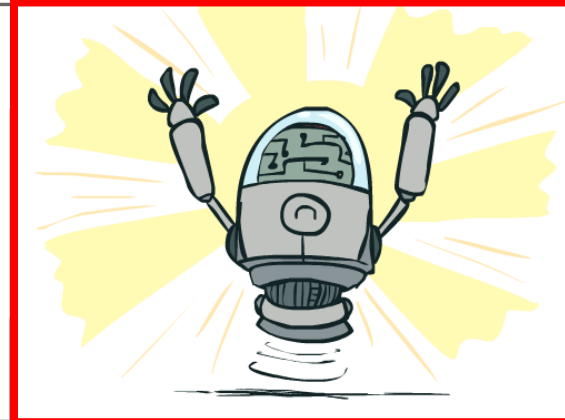


Maximize Your Expected Utility

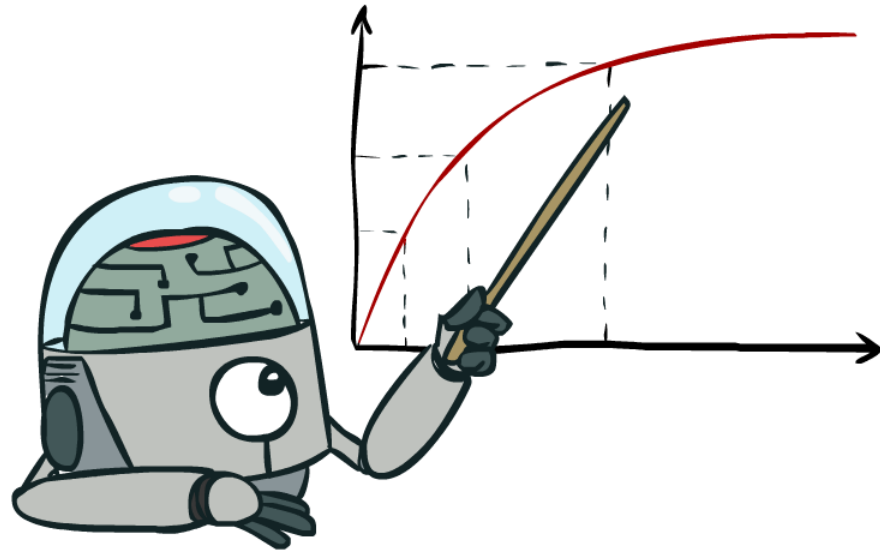

AI definition by John McCarthy

- Artificial intelligence
 - the science and engineering of making intelligent machines, especially intelligent computer programs
- Intelligence
 - the computational part of the ability to achieve goals in the world
- John McCarthy (1927-2011)
 - co-authored the document that coined the term "artificial intelligence" (AI), developed the Lisp programming language family

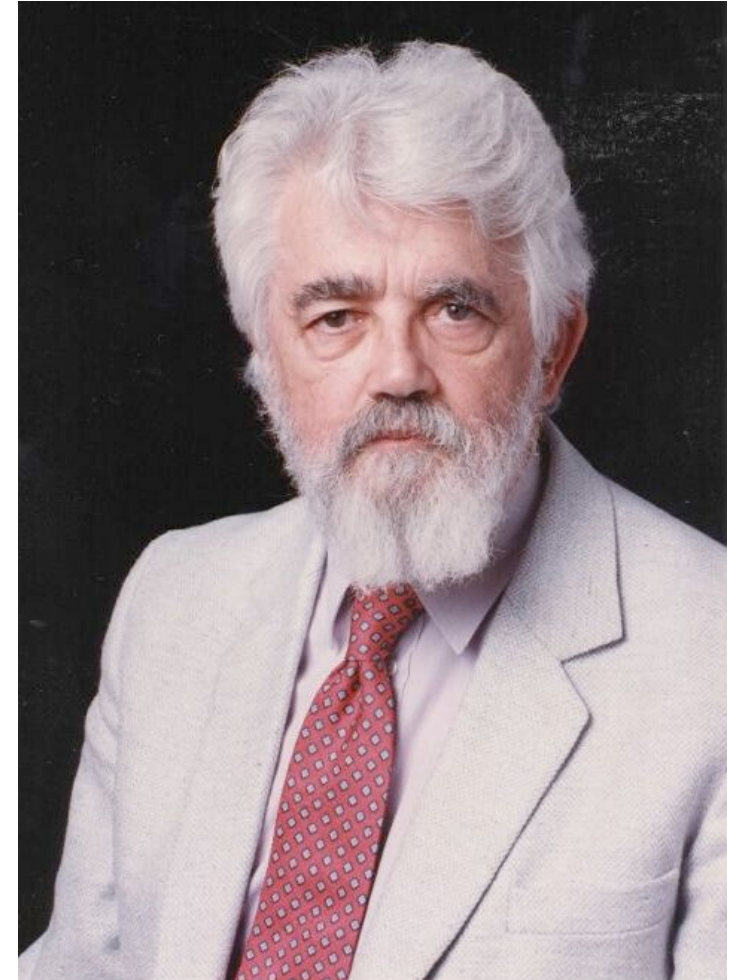

AI and this course

- Describe machines (or computers) that mimic "cognitive" functions that humans associate with the human mind, such as “learning” and “problem solving”.

--Russell, S. J., & Norvig, P. (2016). *Artificial intelligence: a modern approach*. Malaysia; Pearson Education Limited.


- This course is about:
 - General AI techniques for a variety of problem types
 - Learning to recognize when and how a new problem can be solved with an existing technique
 - Computational rationality

What is Machine Learning?

- Term “Machine Learning” coined by Arthur Samuel in 1959
 - Samuel Checkers-playing Program
- Common definition (by Tom Mitchell):
 - ***Machine Learning is the study of computer algorithms that improve automatically through experience***
- Subfield of Artificial Intelligence (AI)
 - The hottest subfield - reinvigorated interest in AI due to deep learning!

Difference between AI and ML

- AI is a **bigger** concept to create intelligent machines that can simulate human thinking capability and behavior
- Machine learning is an application or subset of AI that allows machines to learn from **data** without being programmed explicitly

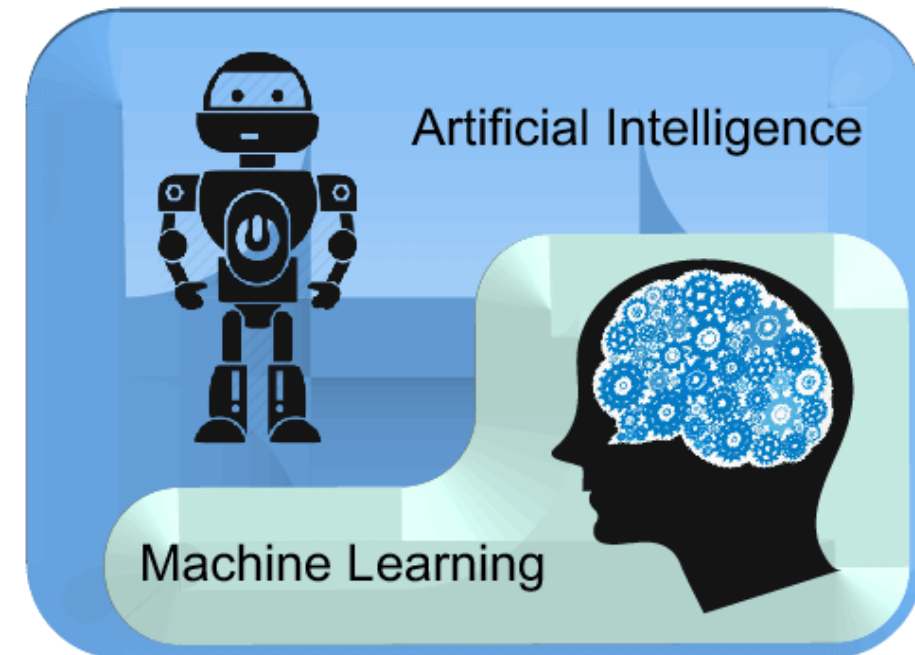


An example of AI but is not machine learning

- A* search algorithm
 - Objective: Find the shortest path between two nodes of a weighted graph
 - Use heuristic information

- Compare with Breadth First Searching and Greedy Searching

Breadth-first searching

- **Pink**: start point, **Purple**: end point
- **Blue**: visited points, the darker the earlier

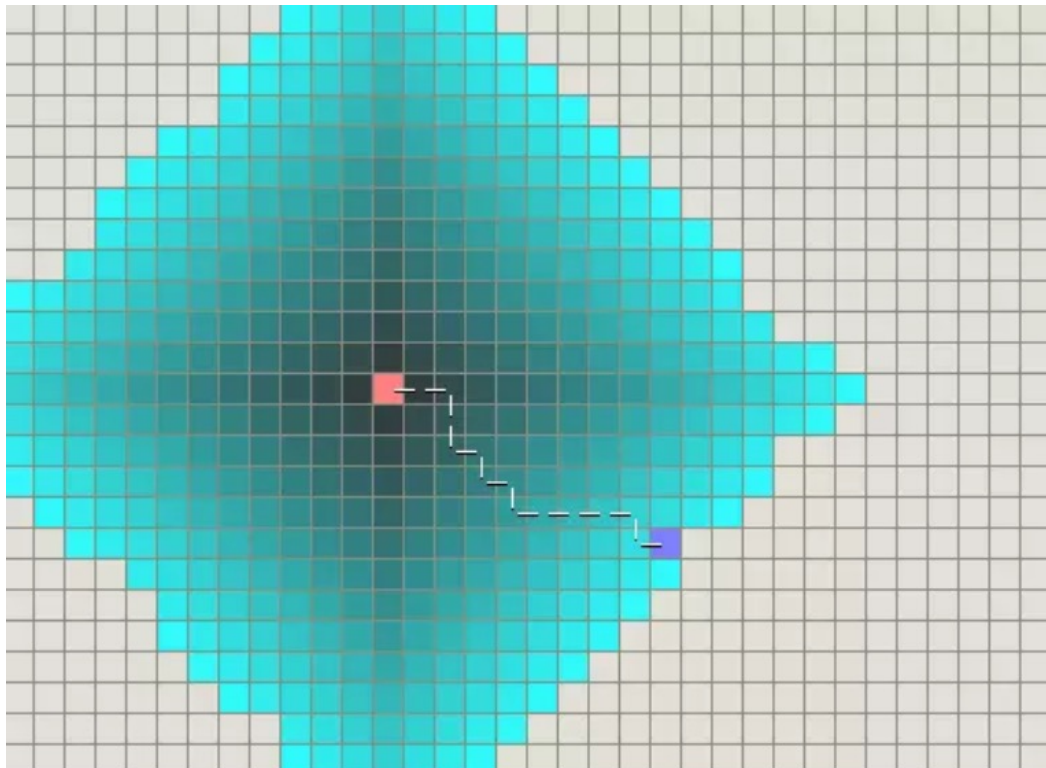


Each time it visits, or expand the point with least $g(n)$ value

- $g(n)$ is the distance from start point to point n


Short comings: computing burden is too high, it visited too many points before getting the end point

Greedy searching

- Each time it visit or expand the point with least $h(n)$ value
 - $h(n)$ is the distance from point n to end point. It works fine when there is no obstacles

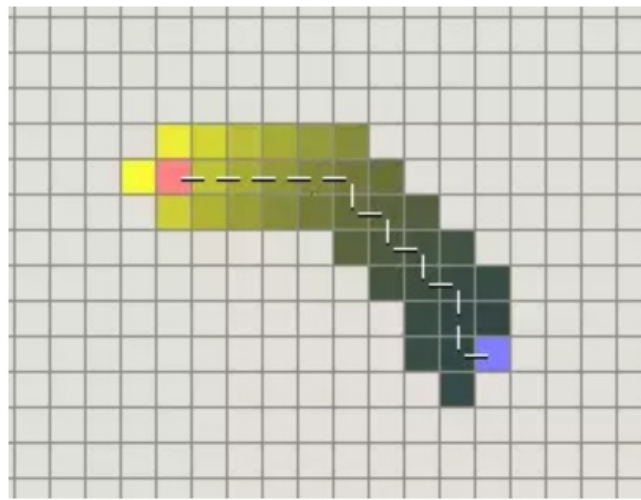



- The cost doubles when there is obstacles

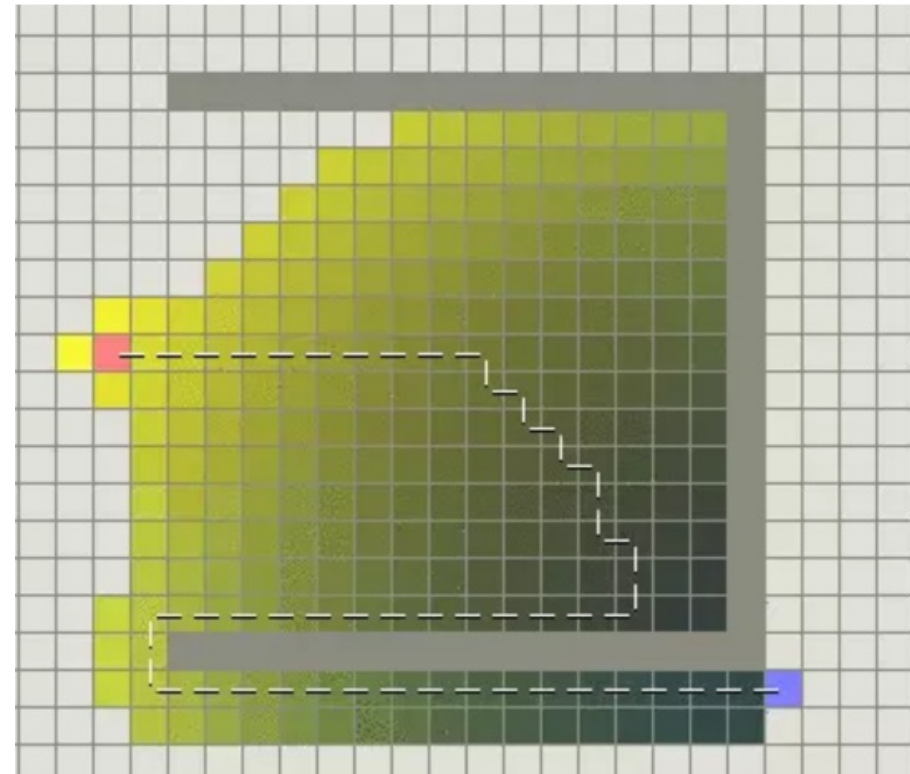

A* algorithm

- It combines the stability of BFS and the heuristics in greedy searching
- Each time it visits point with the least $f(n) = g(n) + h(n)$ value

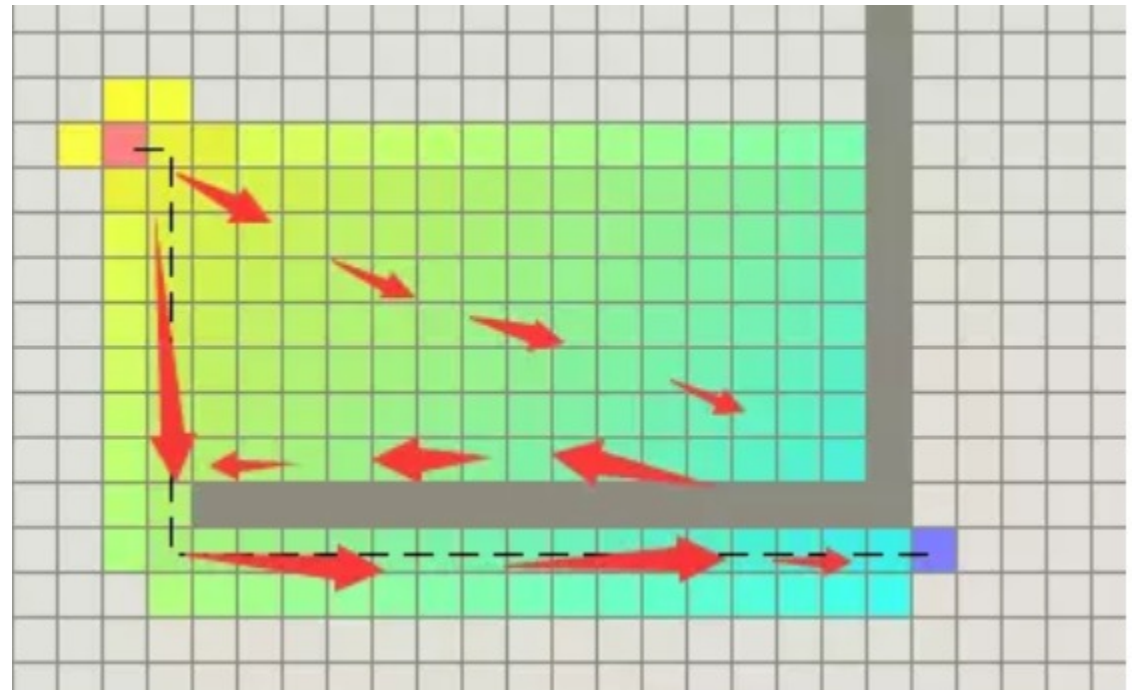

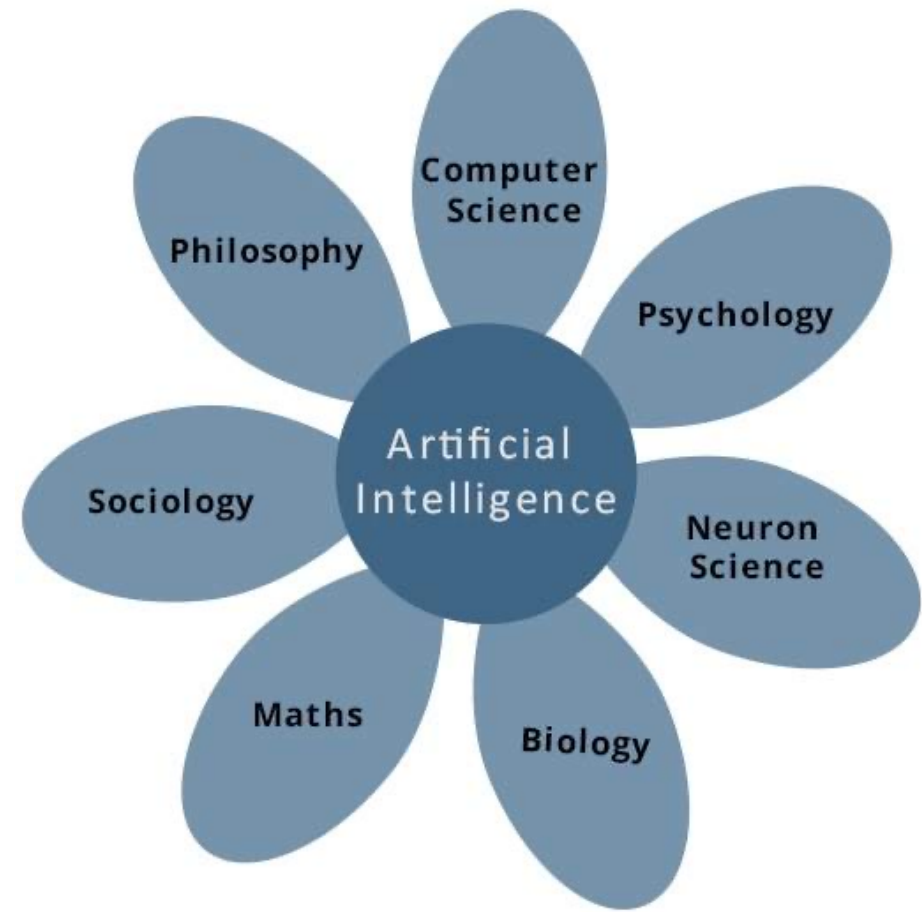

The Foundations of AI

The disciplines that contributed ideas, viewpoints, and techniques to AI

Philosophy

- Can formal rules be used to draw valid conclusions?
- How does the mind arise from a physical brain?
- Where does knowledge come from?
- How does knowledge lead to action?


- Rationalism (理性主义)/materialism (唯物主义)/empiricism (经验主义)



“The only thing I know is that I know nothing”
– Socrates

Mathematics

- What are the formal rules to draw valid conclusions?
- What can be computed?
- How do we reason with uncertain information?
- The first nontrivial **algorithm** is thought to be Euclid's algorithm for computing greatest common divisors (最大公约数)
- The word **algorithm** (and the idea of studying them) comes from al-Khowarazmi, a Persian mathematician of the 9th century
- NP-completeness/probability/entropy

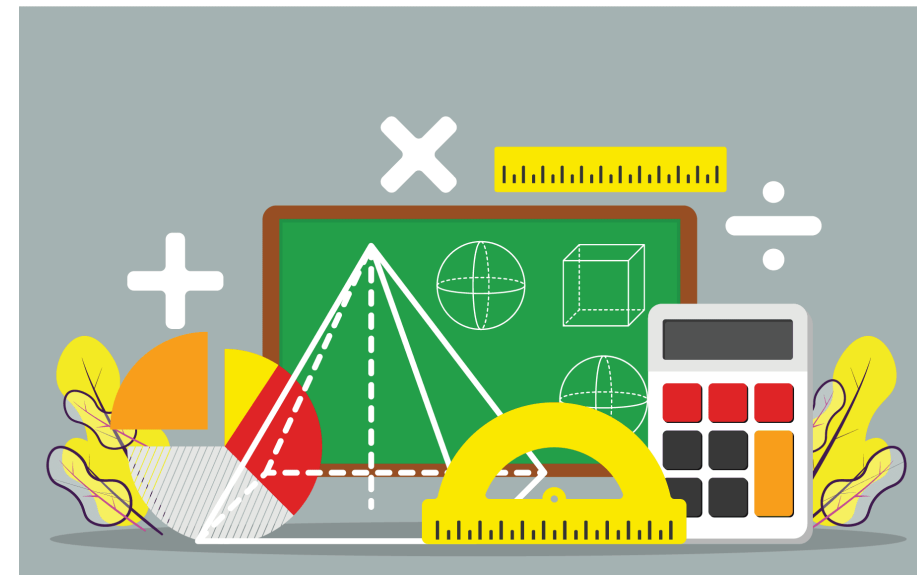


Economics

- How should we make decisions so as to maximize payoff?
- How should we do this when others may not go along?
- How should we do this when the payoff may be far in the future?
- The pioneering AI researcher Herbert Simon (1916–2001) won the Nobel Prize in economics in 1978 for his early work showing that models based on **satisficing**—making decisions that are “good enough,” rather than laboriously calculating an optimal decision—gave a better description of actual human behavior (Simon, 1947)



Neuroscience

- How do brains process information?

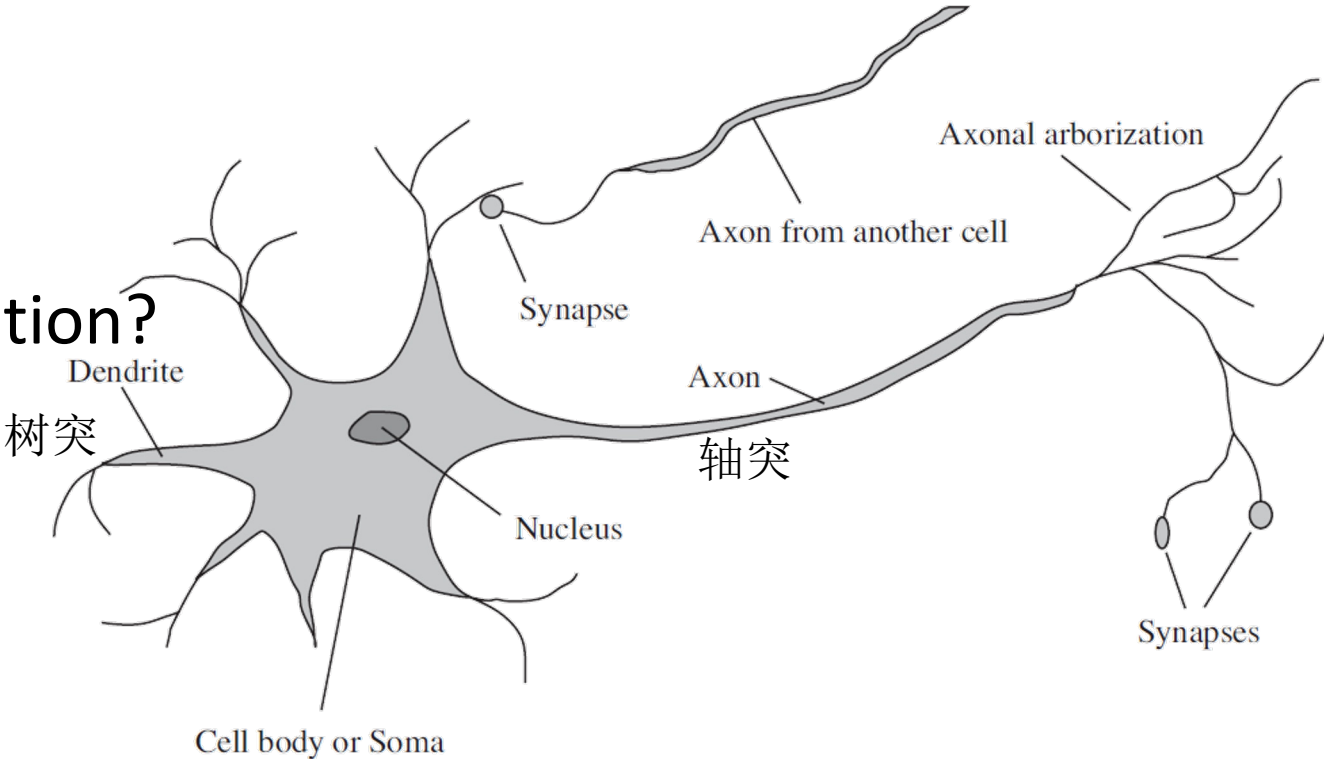

| | Supercomputer | Personal Computer | Human Brain |
|---------------------|---|---|---|
| Computational units | 10^4 CPUs, 10^{12} transistors | 4 CPUs, 10^9 transistors | 10^{11} neurons |
| Storage units | 10^{14} bits RAM 10^{15} bits disk | 10^{11} bits RAM 10^{13} bits disk | 10^{11} neurons 10^{14} synapses |
| Cycle time | 10^{-9} sec | 10^{-9} sec | 10^{-3} sec |
| Operations/sec | 10^{15} | 10^{10} | 10^{17} |
| Memory updates/sec | 10^{14} | 10^{10} | 10^{14} |


Psychology

- How do humans and animals think and act?
- **Cognitive psychology** views the brain as an information-processing device
- **Developmental psychology** is the scientific study of how and why human beings change over the course of their life, especially concerned with infants and children




Computer engineering

- How can we build an efficient computer?
- Designing algorithms is not enough
- Hardware
 - modern digital electronic computer
- Software
 - operating systems, programming languages, and tools needed to write modern programs (and papers about them)
- Work in AI has also pioneered many ideas to mainstream computer science
 - time sharing, interactive interpreters, personal computers with windows and mice

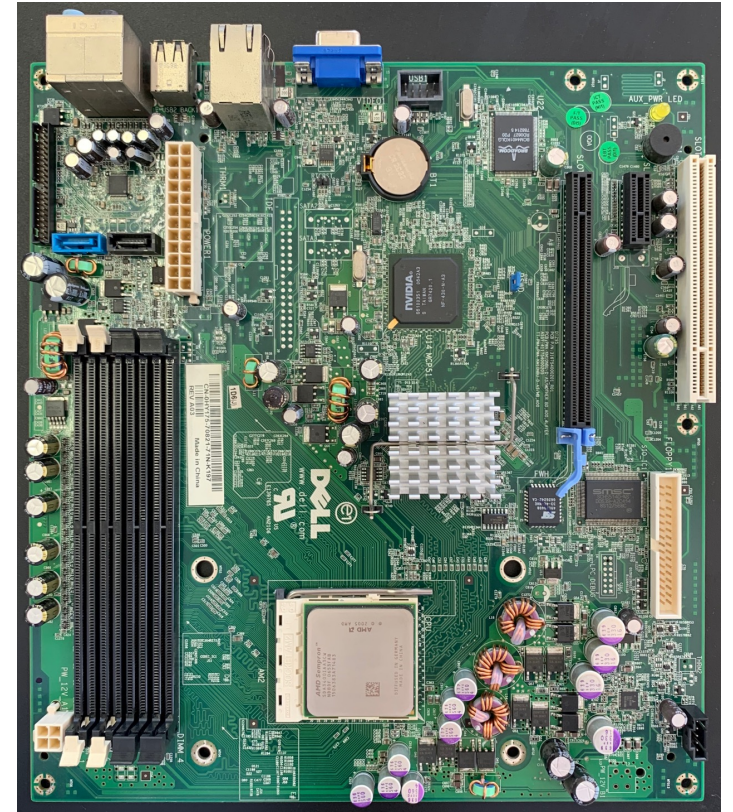

Control theory and cybernetics

- How can artifacts operate under their own control?

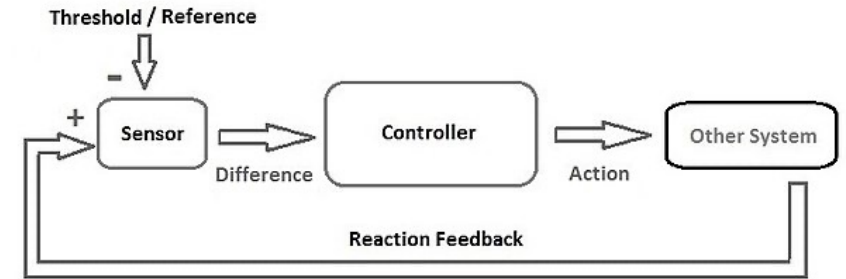


A Cybernetic Loop

- Control theory
 - To design systems that **maximize** an objective function over time
- Differences of control theory and AI:
 - Control theory more care about continuous variables with calculus and matrix algebra as tools
 - AI uses logical inference and computation to deal more discrete problems such as language, vision, and planning

Linguistics


- How does language relate to thought?
- Understanding language requires an understanding of the subject matter and context
 - not just an understanding of the structure of sentences
- Knowledge representation
 - decades of work on the philosophical analysis of language

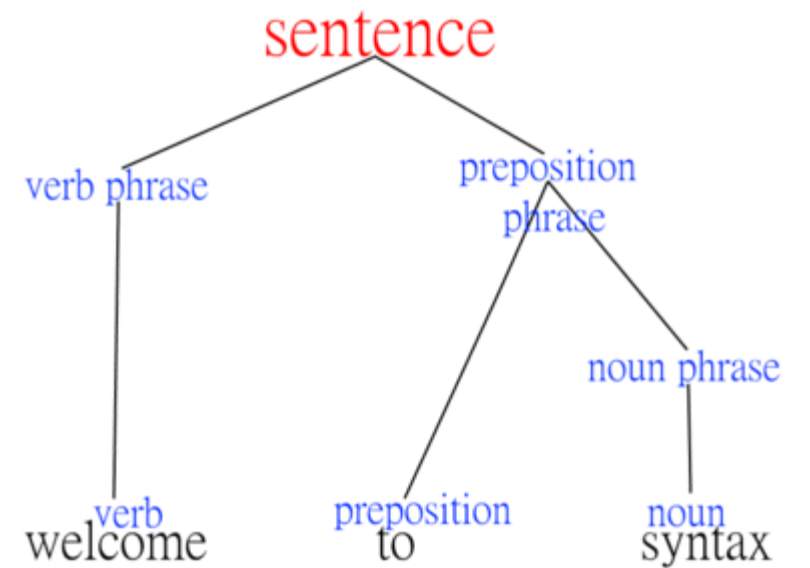

The History of AI

1950s

- Turing's test
- Dartmouth Conference 1956:
the birth of AI

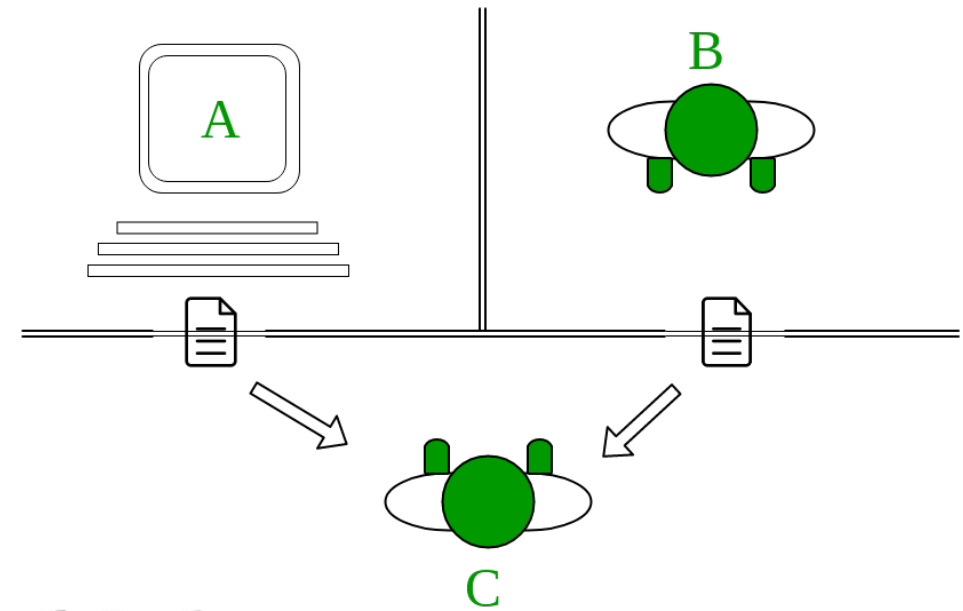


1956 Dartmouth Conference: The Founding Fathers of AI




John MacCarthy



Marvin Minsky



Claude Shannon



Ray Solomonoff




Alan Newell



Herbert Simon



Arthur Samuel



Oliver Selfridge




Nathaniel Rochester



Trenchard More

Chess as the first killer app for AI

- Claude Shannon proposed the first chess playing program in 1950
 - It included adversarial search and minimax (later lecture)
 - It also included many heuristics for faster searching

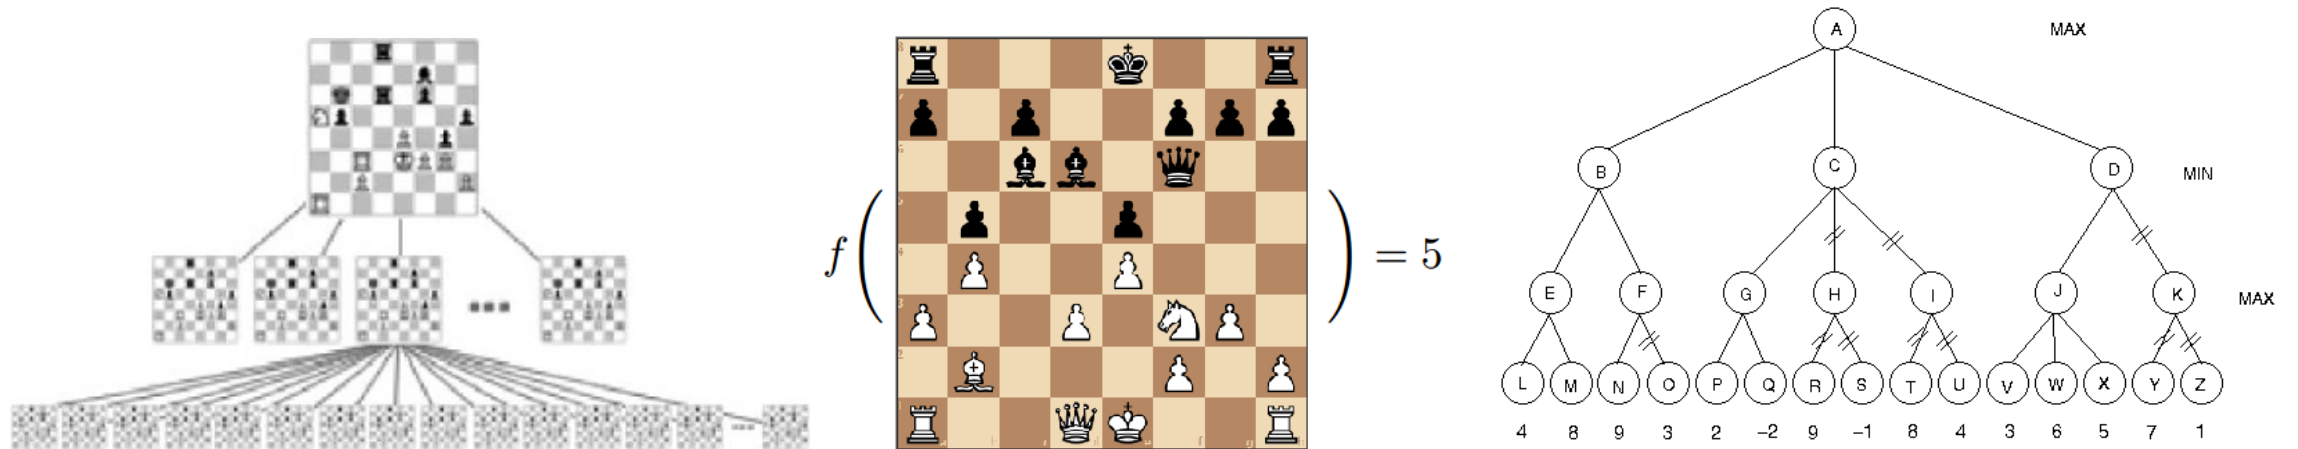

Chess by 1958

TABLE 1 Comparison of Current Chess Programs

| | Turing | Kister, Stein, Ulam, Walden, Wells (Los Alamos) | Bernstein, Roberts, Arbuckle, Belsky (Bernstein) | Newell, Shaw, Simon (NSS) |
|-------------------------|--|--|---|--|
| Vital statistics | | | | |
| Date | 1951 | 1956 | 1957 | 1958 |
| Board | 8 × 8 | 6 × 6 | 8 × 8 | 8 × 8 |
| Computer | Hand simulation | MANIAC-I 11,000 ops./sec | IBM 704 42,000 ops./sec | RAND JOHNNIAC 20,000 ops./sec |
| Chess program | | | | |
| Alternatives | All moves | All moves | 7 plausible moves Sequence of move generators | Variable Sequence of move generators |
| Depth of analysis | Until dead (exchanges only) | All moves 2 moves deep | 7 plausible moves 2 moves deep | Until dead Each goal generates moves |
| Static evaluation | Numerical Many factors | Numerical Material, mobility | Numerical Material, mobility Area control King defense | Nonnumerical Vector of values Acceptance by goals |
| Integration of values | Minimax | Minimax (modified) | Minimax | Minimax |
| Final choice | Material dominates Otherwise, best value | Best value | Best value | 1. First acceptable 2. Double function |
| Programming | | | | |
| Language | | Machine code | Machine code | IPL-IV, interpretive |
| Data scheme | | Single board No records | Single board Centralized tables Recompute | Single board Decentralized List structure Recompute |
| Time | Minutes | 12 min/move | 8 min/move | 1-10 hr/move (est.) |
| Space | | 603 words | 7000 words | Now 6000 words, est. 16,000 |
| Results | | | | |
| Experience | 1 game | 3 games (no longer exists) | 2 games | 0 games |
| Description | Loses to weak player Aimless Subtleties of evaluation lost | Beats weak player Equivalent to human with 20 games experience | Passable amateur Blind spots Positional | Some hand simulation Good in spots (opening) No aggressive goals yet |

45

Allen Newell
J. C. Shaw
H. A. Simon


Chess-Playing Programs and the Problem of Complexity

The promise of AI


- In 1965, Herbert Simon predicted that “machines will be capable, within 20 years, of doing any work a man can do”
- In 1967, AI pioneer Marvin Minsky predicted “in from three to eight years we will have a machine with the general intelligence of an average human being.”
- In 1967, John McCarthy told the U.S. government that it would be possible to build “a fully intelligent machine” in the space of a decade

1970s - first AI winter



- Limited computer power
- Intractability and the **combinatorial explosion**
- Commonsense knowledge and reasoning
 - Hard to encode so many concepts and rules
 - Didn't know how to teach computers to learn these

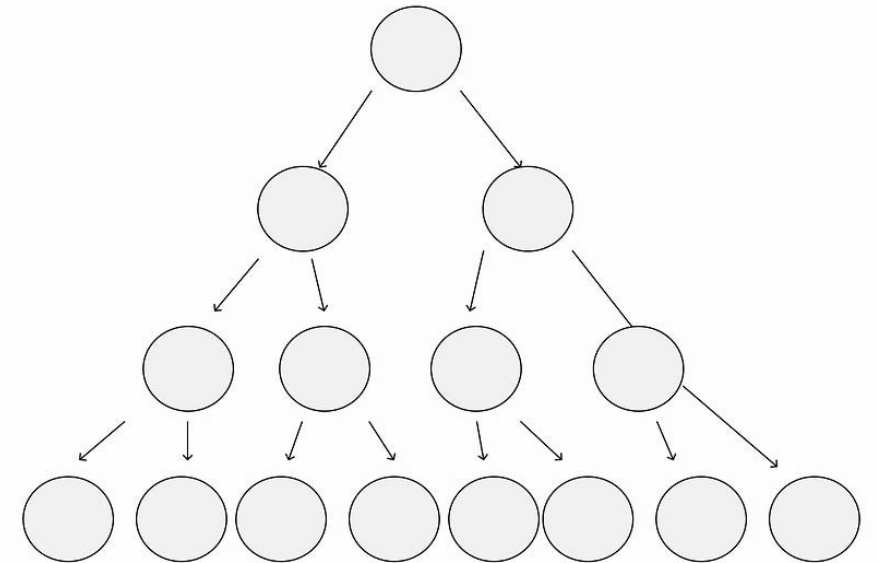

Computer vision, blocks world, natural language

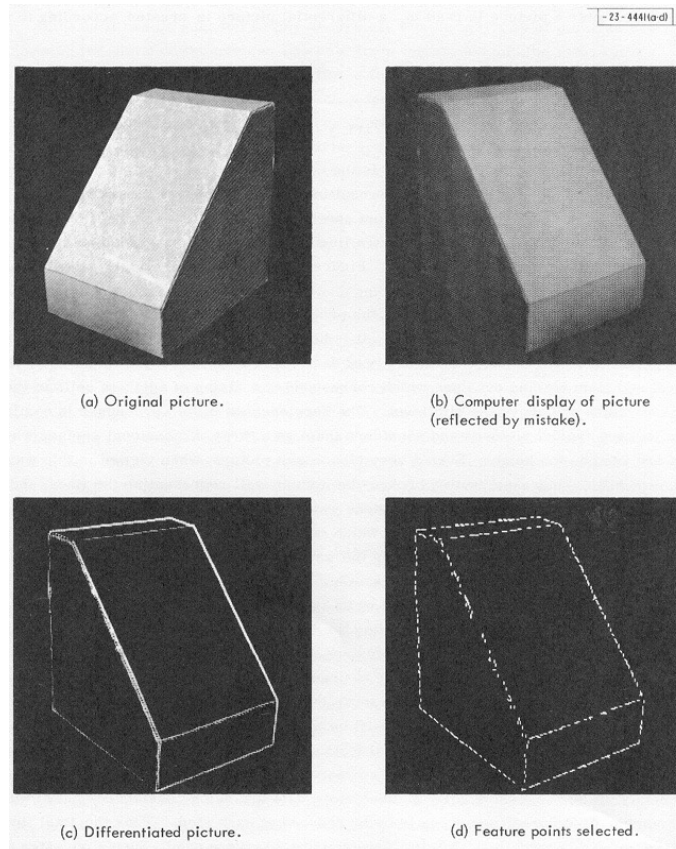

Larry Roberts 1963 Thesis

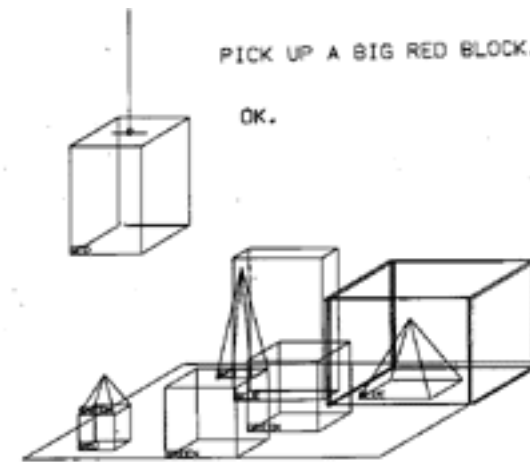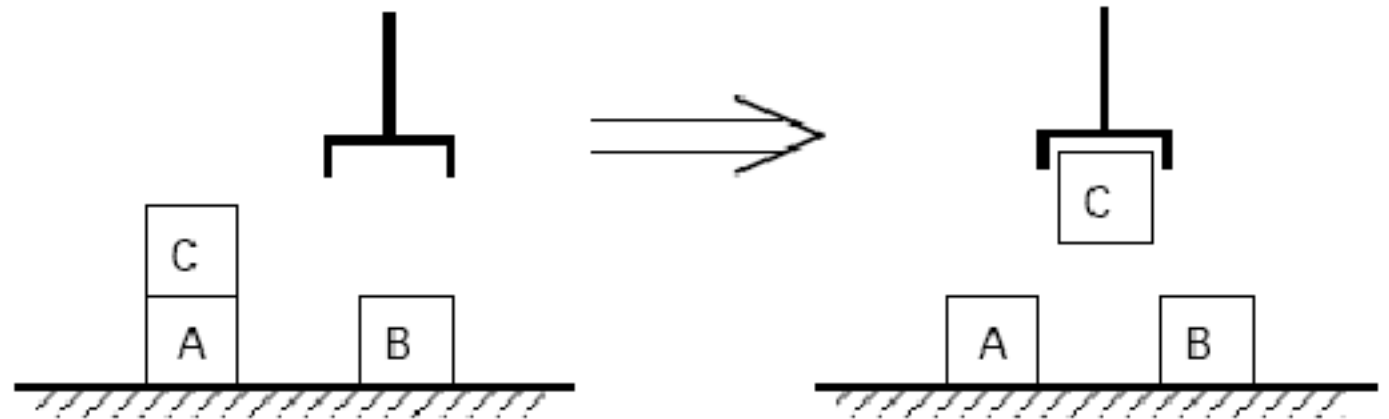

Terry Winograd's 1971 Thesis on SHRDLU
for natural language understanding

Early robots

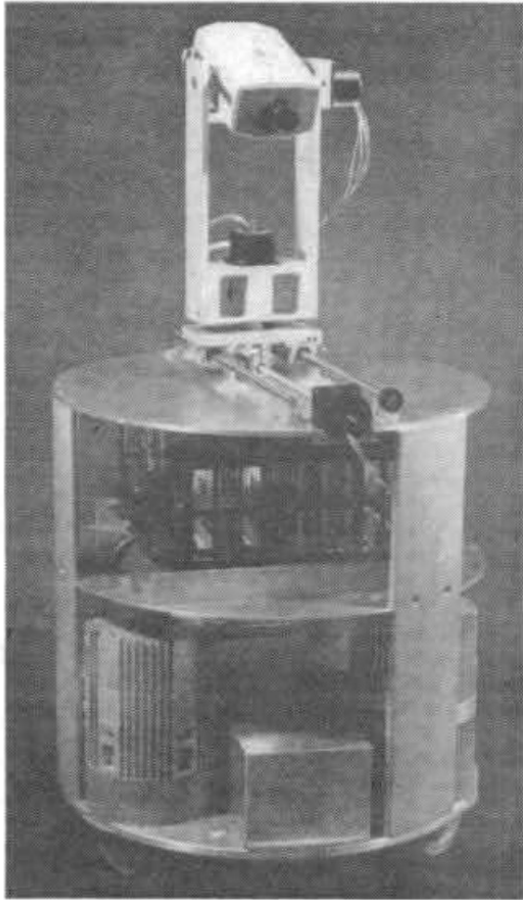


Fig. 8. The CMU Rover.

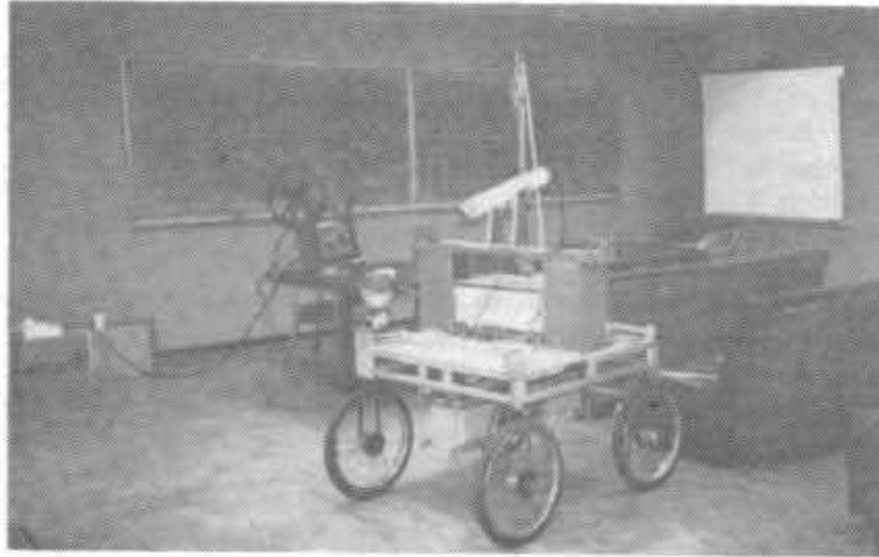


Fig. 1. The Stanford Cart.

1983 – mobile robots by Hans Moravec



Dean Pomerleau (CMU) 1986
NAVLAB controlled by NNs

<https://www.nytimes.com/video/science/1247468063802/stanford-cart.html>
<https://www.youtube.com/watch?v=ntIczNQKfjQ>

Rise of statistical approaches: 1990s – 2000s

- Knowledge-based:
 - Search for a solution using general search algorithms
 - Encode knowledge that humans have and use logic to solve
- Statistical:
 - Learning patterns and choosing solutions based on observed likelihood

Deep Blue


- Started in the mid-1980s at CMU, didn't win until 1997
- Project moved to IBM
- “Good Old-Fashioned” Brute Force Search using custom hardware



- Win Garry Kasparov by 3.5:2.5 on Chess
- Search over 12 following steps

- <https://www.youtube.com/watch?v=KF6sLCeBj0s>

Evolution of AI research:1990s

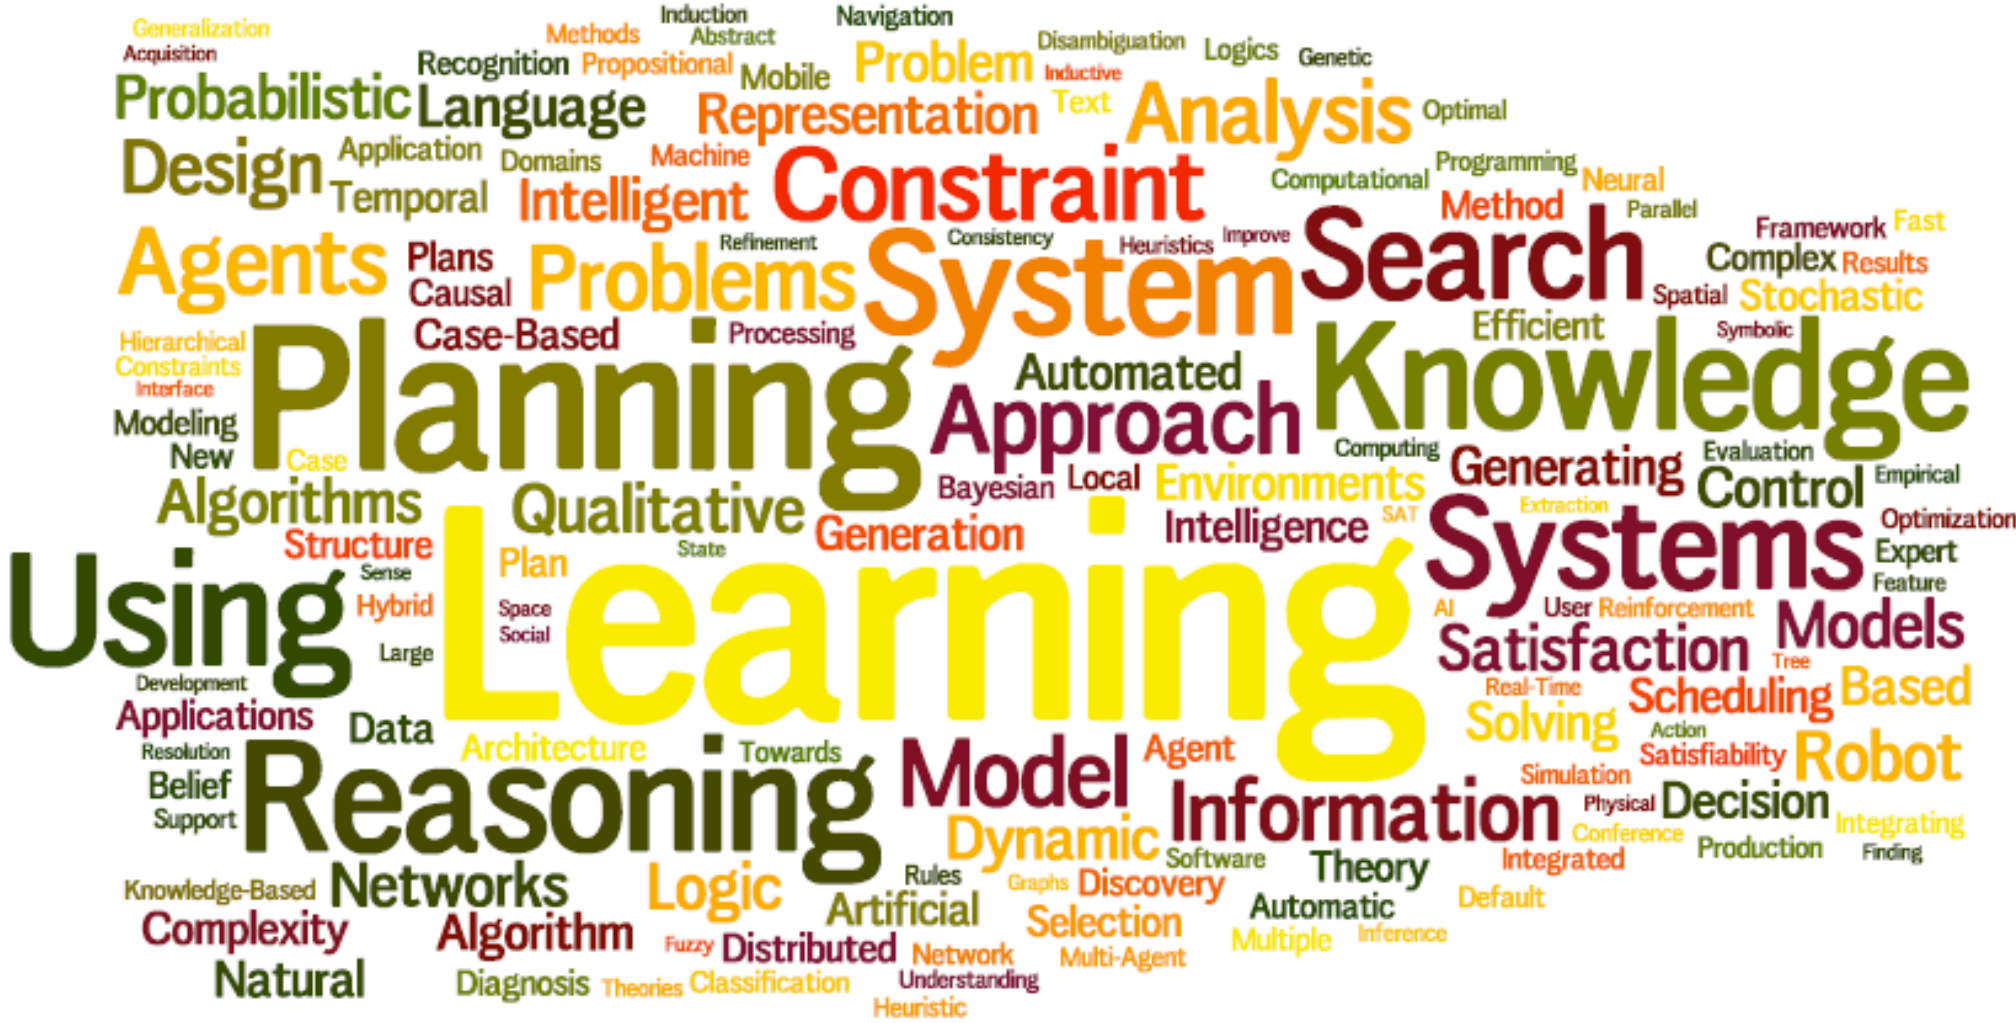

2010s-now

- Deep learning
 - The return of neural networks
- Big data
 - Large datasets, like ImageNet
- Computational power
- Artificial general intelligence (AGI)

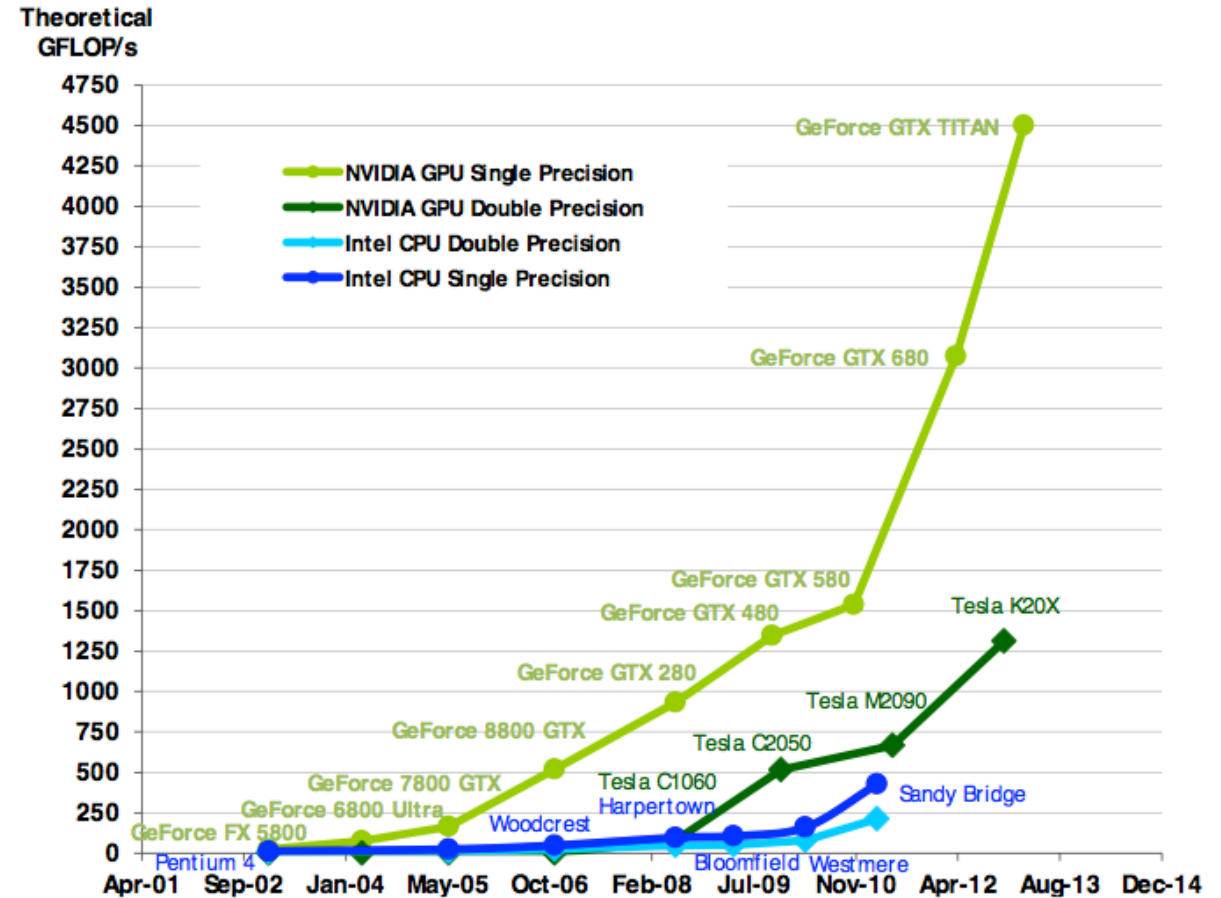



Figure 1 Floating-Point Operations per Second for the CPU and GPU

Computer Vision (CV) -- ImageNet, AlexNet




IMAGENET www.image-net.org

22K categories and **15M** images

- Animals
 - Bird
 - Fish
 - Mammal
 - Invertebrate
- Plants
 - Tree
 - Flower
 - Food
 - Materials
- Structures
 - Artifact
 - Tools
 - Appliances
 - Structures
- Person
 - Scenes
 - Indoor
 - Geological Formations
 - Sport Activities


Deng, Dong, Socher, Li, Li, & Fei-Fei, 2009

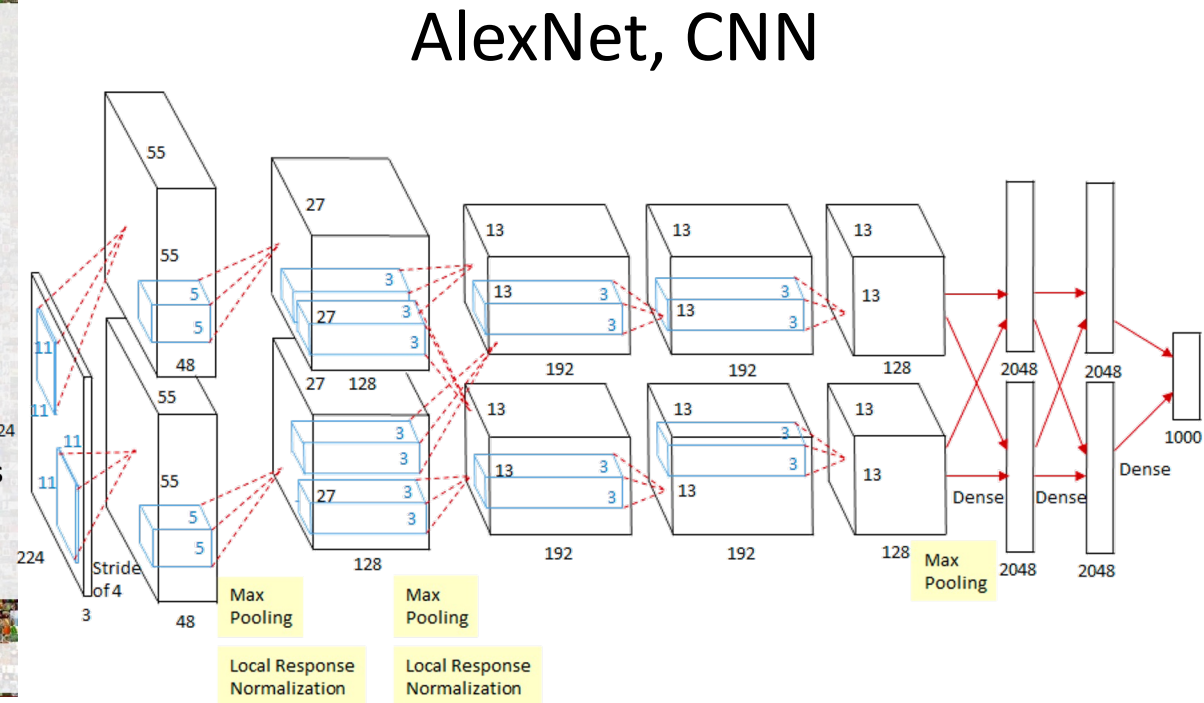

Deng, J., Dong, W., Socher, R., Li, L. J., Li, K., & Fei-Fei, L. (2009, June). Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition* (pp. 248-255). IEEE.

Krizhevsky, A., Sutskever, I., & Hinton, G. E. (2012). Imagenet classification with deep convolutional neural networks. In *Advances in neural information processing systems* (pp. 1097-1105).


CV -- GAN

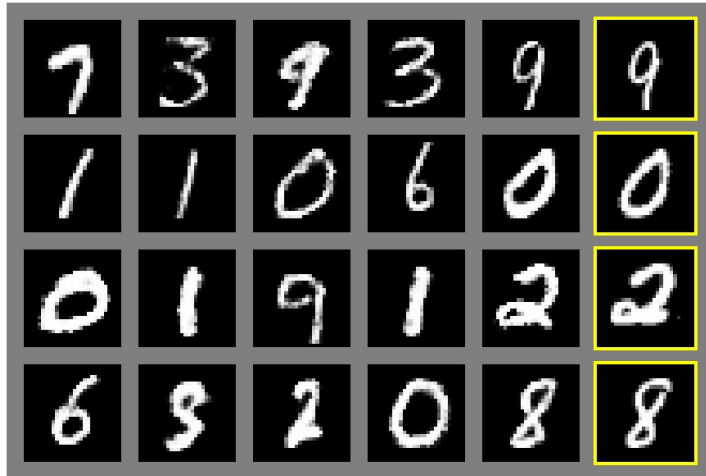


a)



b)

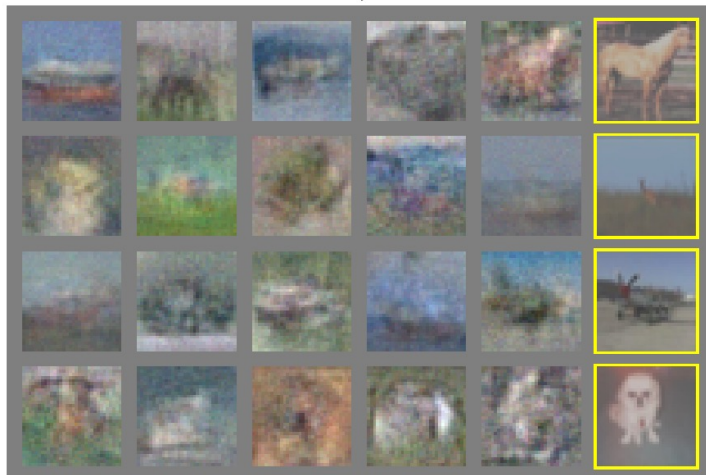


c)

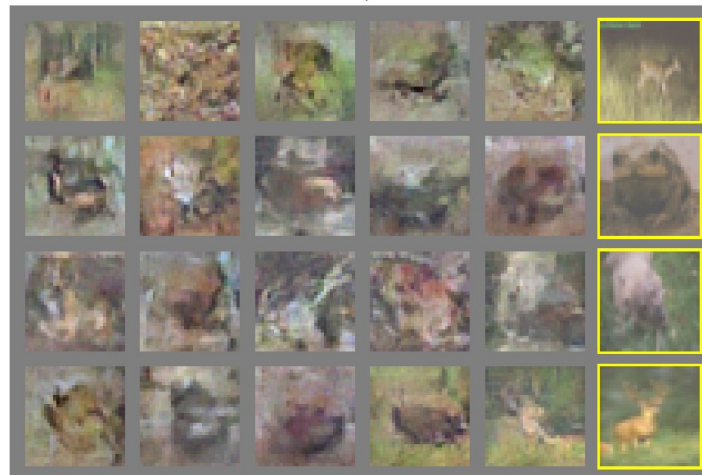

d)

Goodfellow, I., Pouget-Abadie, J., Mirza, M., Xu, B., Warde-Farley, D., Ozair, S., ... & Bengio, Y. (2014). Generative adversarial nets. In *Advances in neural information processing systems* (pp. 2672-2680).

CV (Detection) -- R-CNN, Fast R-CNN, Faster R-CNN


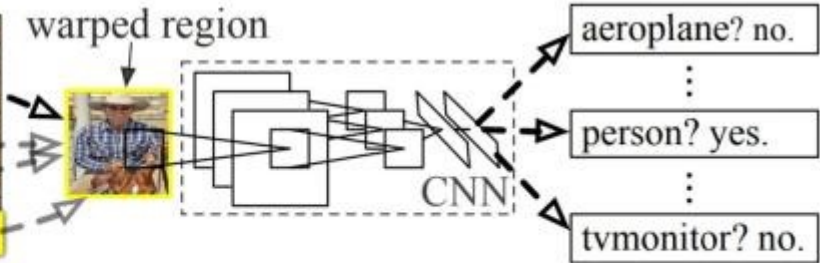


1. Input image

2. Extract region proposals (~2k)

3. Compute CNN features

4. Classify regions

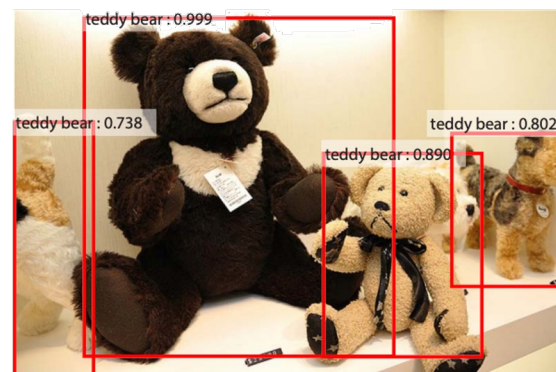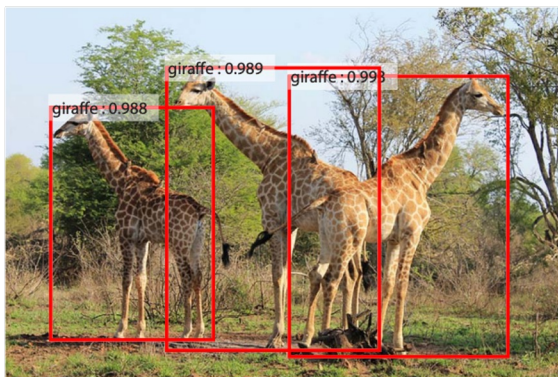

1. Girshick, R., Donahue, J., Darrell, T., & Malik, J. (2014). Rich feature hierarchies for accurate object detection and semantic segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 580-587).

2. Girshick, R. (2015). Fast r-cnn. In *Proceedings of the IEEE international conference on computer vision* (pp. 1440-1448).

3. Ren, S., He, K., Girshick, R., & Sun, J. (2015). Faster r-cnn: Towards real-time object detection with region proposal networks. In *Advances in neural information processing systems* (pp. 91-99).

Speech recognition (Unsupervised, ICA)

Mixed

Separated


Speech recognition (Unsupervised, ICA, cont.)

Mixed

Separated



Speech recognition

- Previous works use
 - Hidden Markov models (HMMs)
 - Deal with the temporal variability of speech
 - Gaussian mixture models (GMMs)
 - Determine how well each state of each HMM fits a frame or a short window of frames of coefficients that represents the acoustic input
- New
 - Feed-forward neural network
 - Takes several frames of coefficients as input and produces posterior probabilities over HMM states as output

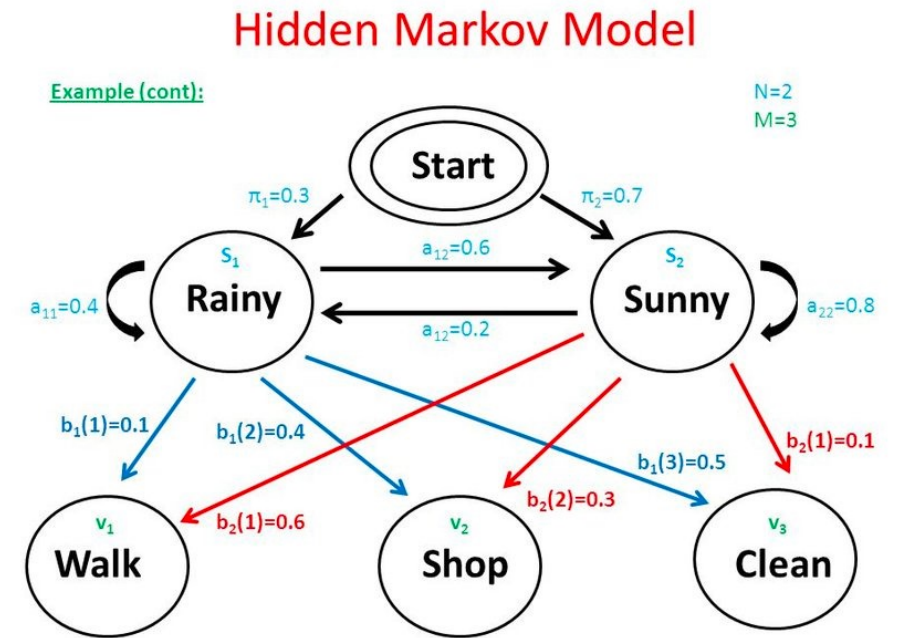


Speech recognition

■ Deep Learning: From **GMM-HMM** to **DNN-HMM**

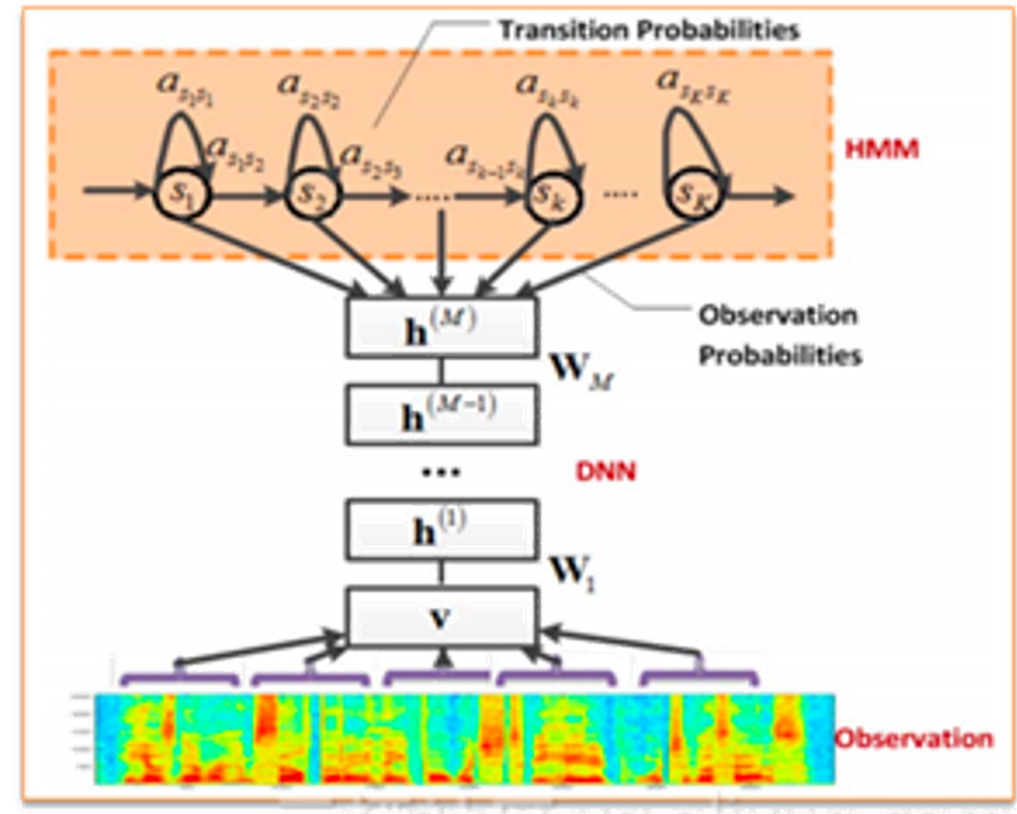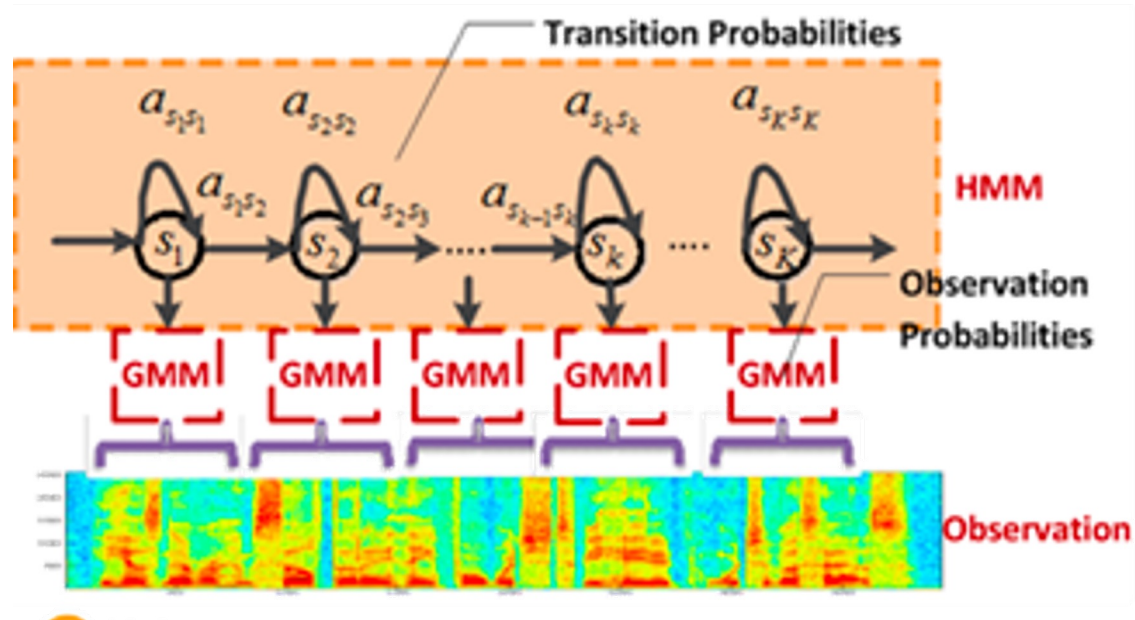

Natural Language Processing (NLP) -- Word2Vec

Image and audio processing systems work with rich, high-dimensional datasets encoded as vectors.

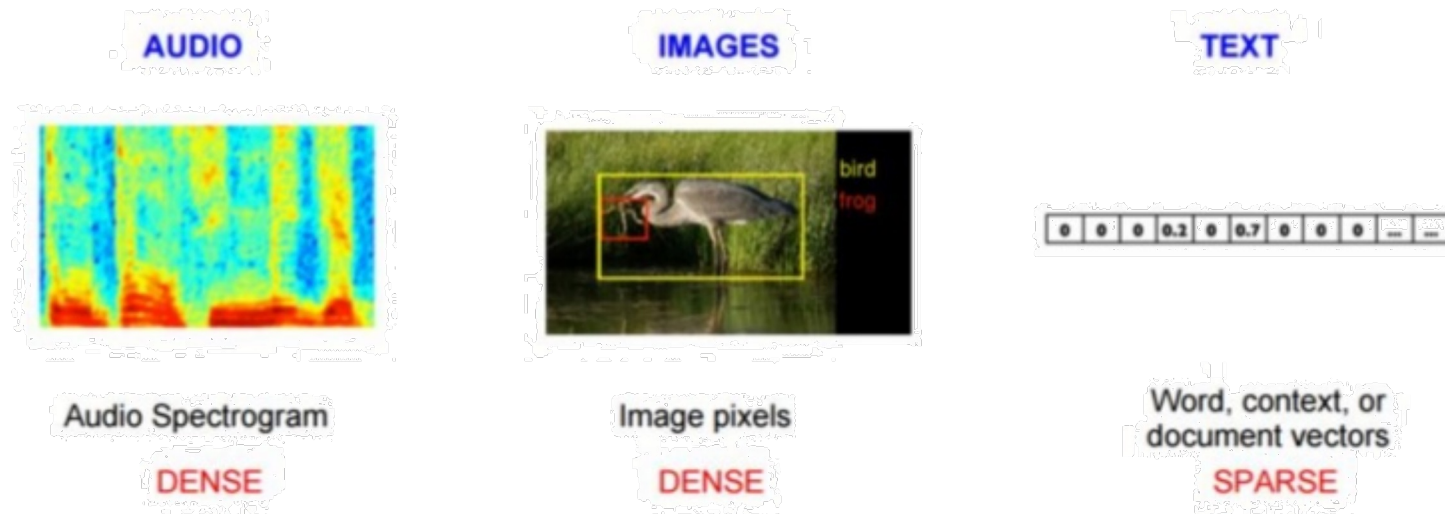

Pennington, J., Socher, R., & Manning, C. (2014, October). Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)* (pp. 1532-1543).

Natural Language Processing (NLP) -- Word2Vec (cont.)

Word Analogies

Test for linear relationships, examined by Mikolov et al. (2014)



a:b :: c:?



$$d = \arg \max_x \frac{(w_b - w_a + w_c)^T w_x}{\|w_b - w_a + w_c\|}$$

man:woman :: king:?

| | |
|---------|---------------|
| + king | [0.30 0.70] |
| - man | [0.20 0.20] |
| + woman | [0.60 0.30] |
| <hr/> | |
| queen | [0.70 0.80] |

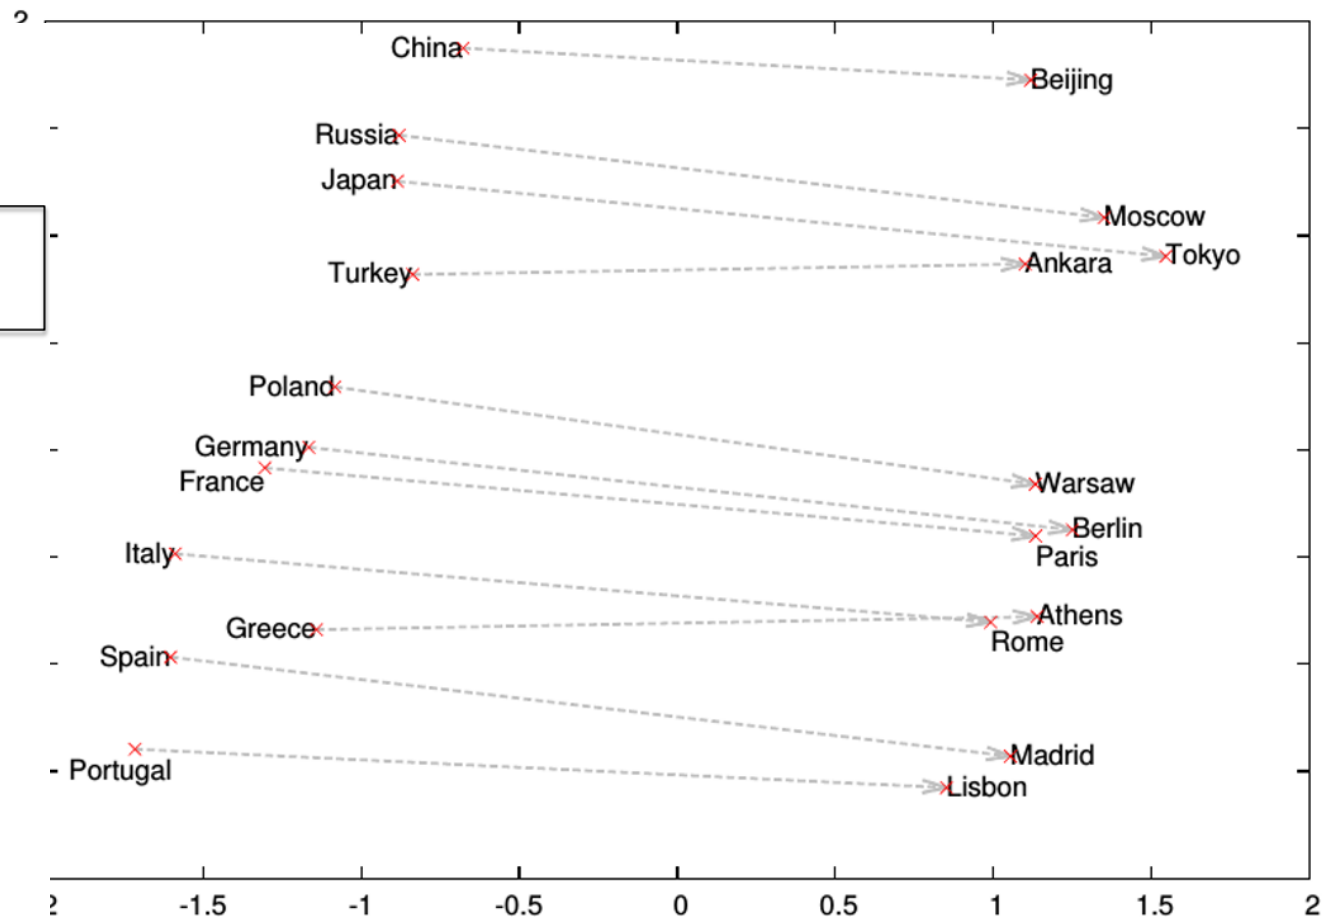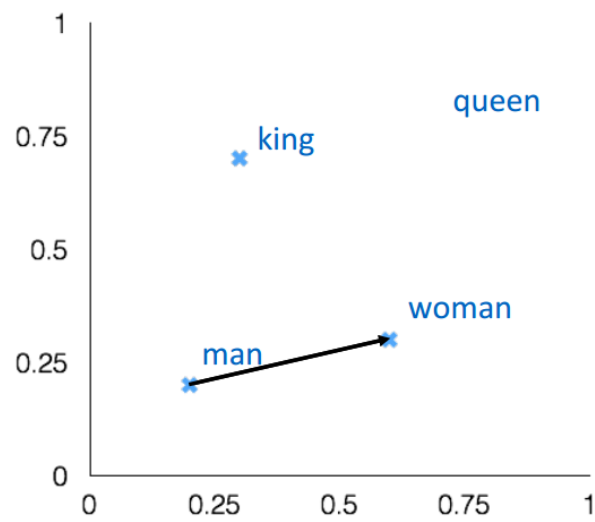

NLP – BERT (Bidirectional Encoder Representations from Transformers)

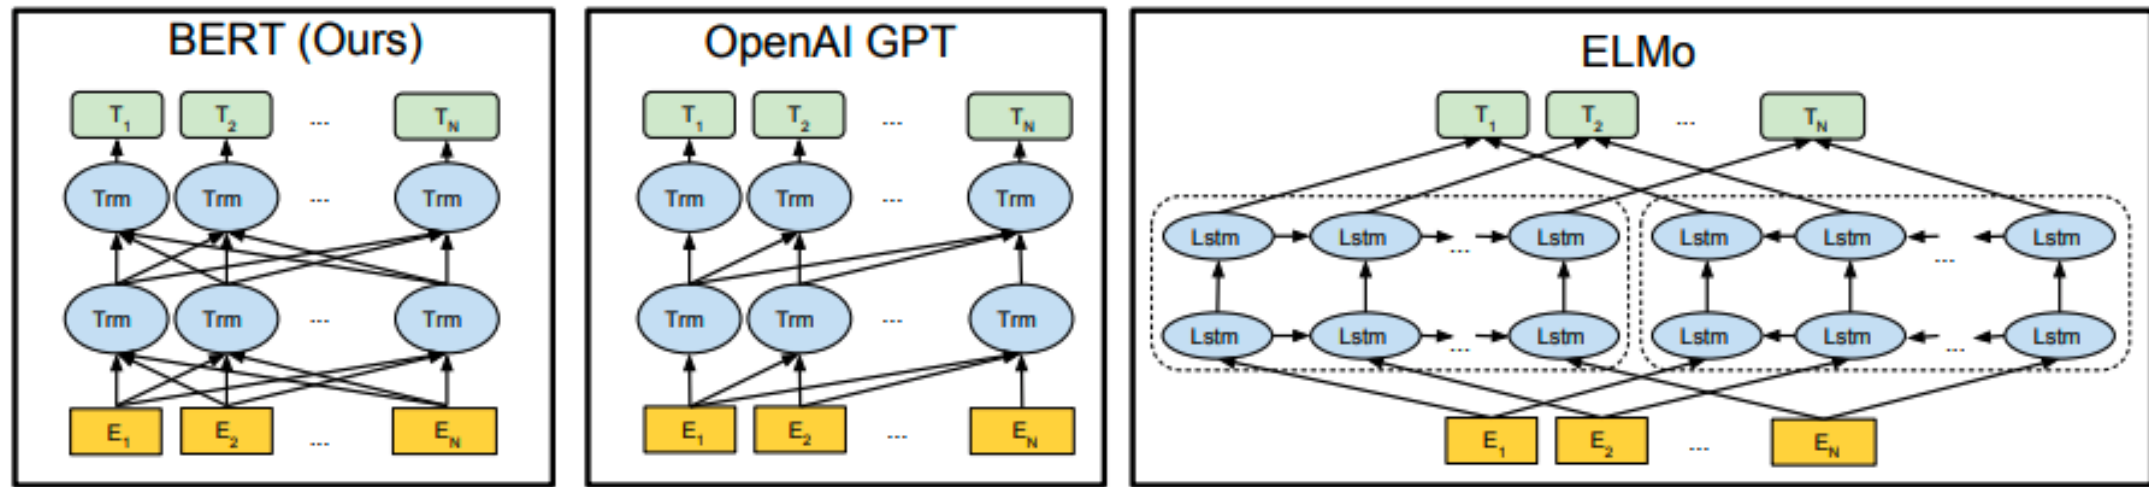



Figure 1: Differences in pre-training model architectures. BERT uses a bidirectional Transformer. OpenAI GPT uses a left-to-right Transformer. ELMo uses the concatenation of independently trained left-to-right and right-to-left LSTM to generate features for downstream tasks. Among three, only BERT representations are jointly conditioned on both left and right context in all layers.

- The pre-trained BERT model can be finetuned **with just one additional output layer** to create state-of-the-art models for a wide range of tasks, such as question answering and language inference, without substantial task-specific architecture modifications
- It obtains new state-of-the-art results on 11 natural language processing tasks

NLP: GPT-3

- Generative Pre-trained Transformer 3
 - An autoregressive language model that uses deep learning to produce human-like text
- For example on prompted GPT-3 to tell an amusing short story about what happens when Georg Cantor decides to visit Hilbert's hotel

Performance of Customized GPT-3 vs Prompt Design

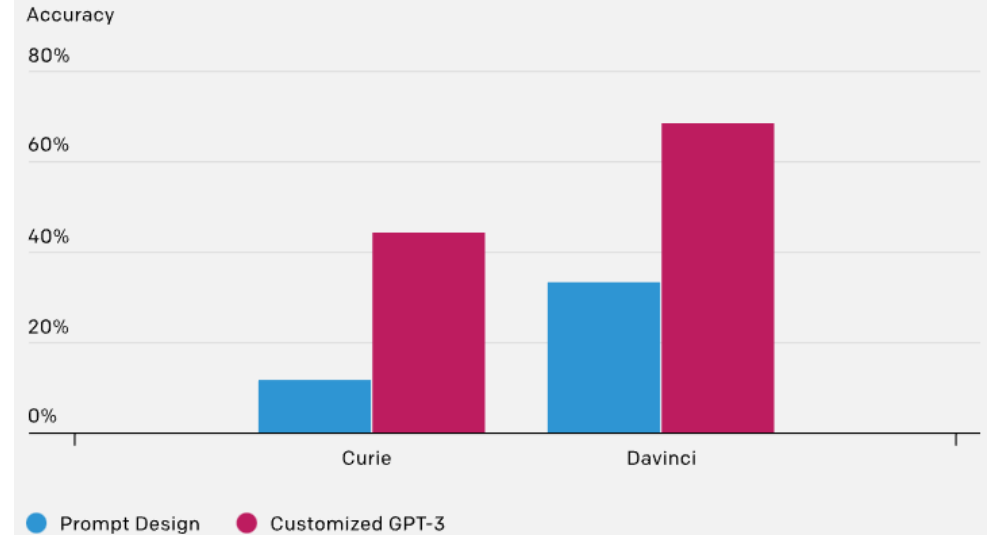

Two sizes of GPT-3 models, Curie and Davinci, were fine-tuned on 8,000 examples from one of our most challenging research datasets, Grade School Math problems. We compare the models' ability to solve problems when 10 completions are created.


Georg Cantor, the famous mathematician, was having dinner with some other famous mathematicians at a hotel. At the end of the meal, the waiter brought him the bill and Cantor discovered to his horror that the bill was the sum of two inconsistent infinite series, the one a simple geometric series and the other the harmonic series.

Cantor wrote to the manager of the hotel protesting that it was impossible for the waiter to have computed the bill, and requested that the waiter be sent to talk to him. The waiter came over and started to explain.

Cantor: Excuse me, but I know the sum of the harmonic series is infinitely greater than the sum of the simple geometric series, so you have erred.

Waiter: Yes, but you see, sir, the geometric series was for the dinner, and the harmonic series was for the service.


AlphaGo 2016

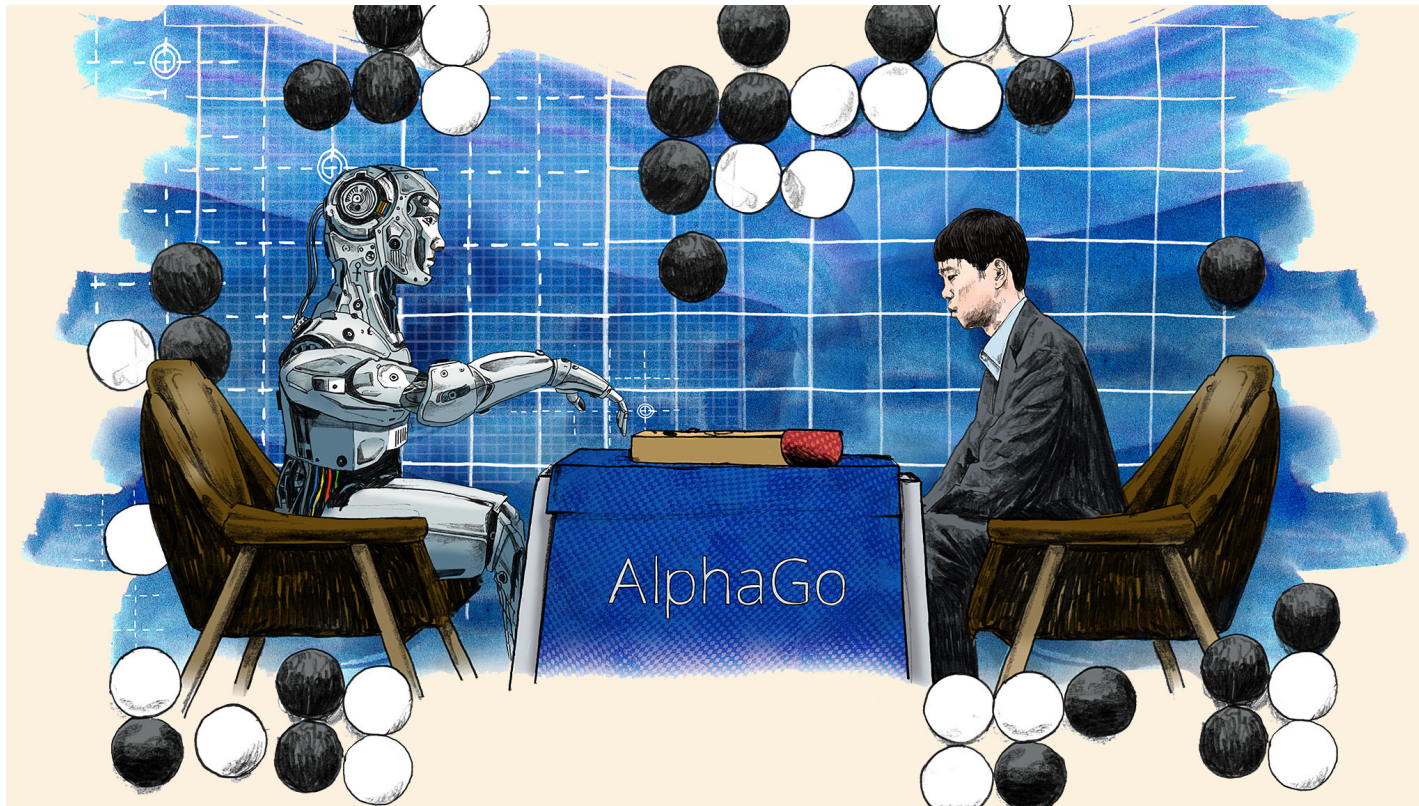

- Win Lee Sedol by 4:1 on Go
- Efficient search on large solution space

Silver, D., Huang, A., Maddison, C. J., Guez, A., Sifre, L., Van Den Driessche, G., ... & Dieleman, S. (2016). Mastering the game of Go with deep neural networks and tree search. *nature*, 529(7587), 484.

Texas hold'em 2017

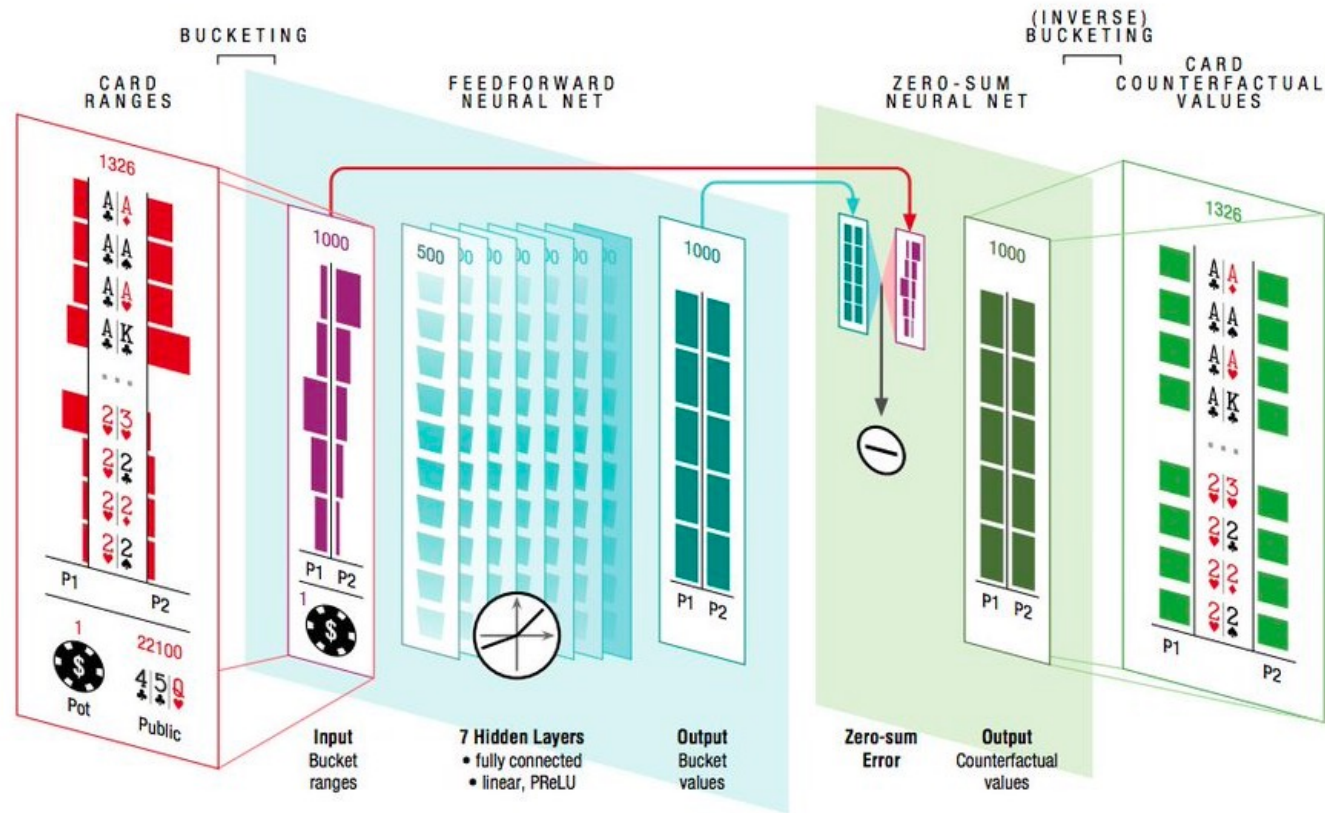

DeepStack

- In a study involving 44,000 hands of poker, DeepStack defeated with statistical significance professional poker players in heads-up no-limit Texas hold'em
- Imperfect information setting

Moravčík, M., Schmid, M., Burch, N., Lisý, V., Morrill, D., Bard, N., ... & Bowling, M. (2017). Deepstack: Expert-level artificial intelligence in heads-up no-limit poker. *Science*, 356(6337), 508-513.

History of game AI

1956 checkers

1992 backgammon



1994 checkers

1997 chess

2016 Go

2017 Texas hold'em

2019 Majiang

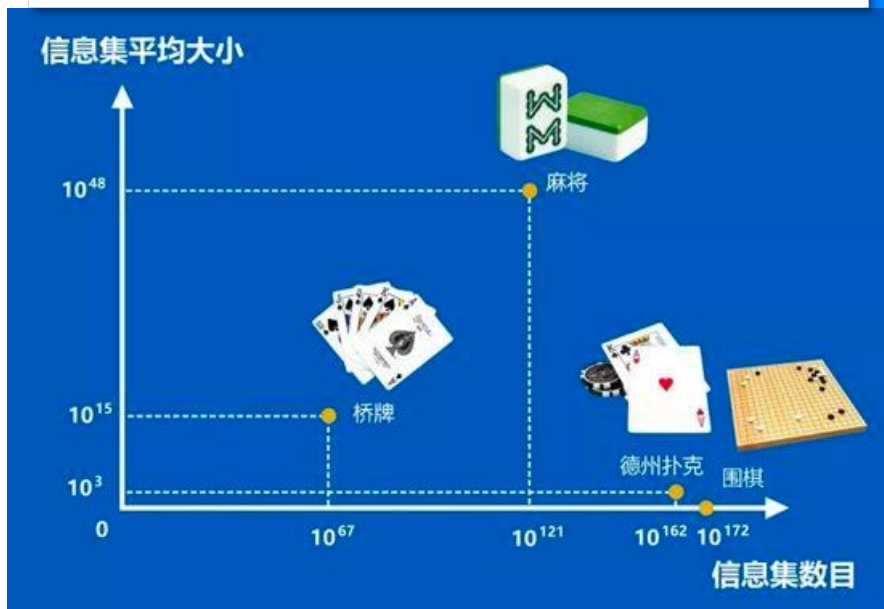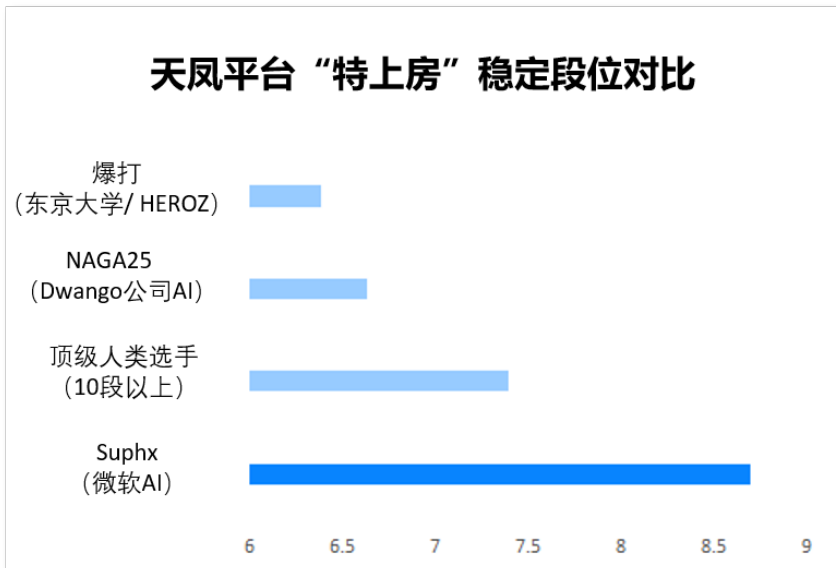

1956年

Arthur Samuel开发的AI程序首先应用于国际跳棋

1992年

Hans Berliner开发的AI程序在双陆棋中取得突破

1994年

Jonathan Schaeffer团队开发的AI程序战胜国际跳棋世界冠军

Chinook



许峰雄团队开发的AI程序击败国际象棋世界冠军

1997年

DeepMind团队开发的AI程序战胜围棋世界冠军

2016年

Deep Blue



2017年

卡耐基梅隆大学、Facebook AI以及阿尔伯特大学开发的AI程序在德州扑克取得突破

下一个里程碑在哪里?



AlphaGo



Libratus

Pluribus


DeepStack

Game playing – state of the art



Recent popularity of AI and ML

Google Trends Keywords 2009 - 2017 for Germany

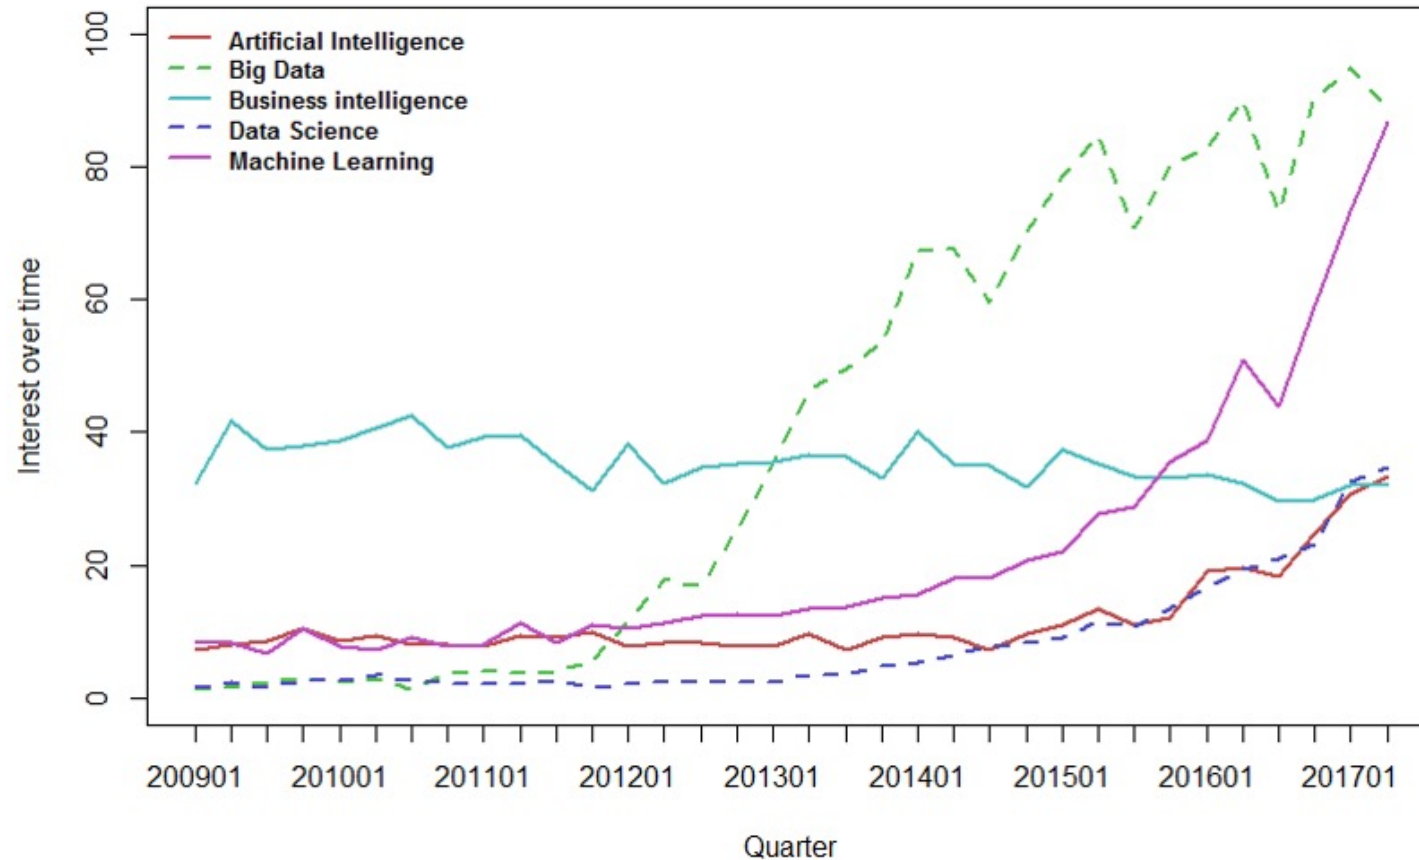

AI and machine learning together: 2010s and 2020s

We've spent years feeding neural nets vast amounts of data, teaching them to think like human brains. They're crazy-smart, but they have absolutely no common sense. What if we've been doing it all wrong? BETH HOLZER

CLIVE THOMPSON

BUSINESS 11.13.2018 06:00 AM

How to Teach Artificial Intelligence Some Common Sense

We've spent years feeding neural nets vast amounts of data, teaching them to think like human brains. They're crazy-smart, but they have absolutely no common sense. What if we've been doing it all wrong?

2,456 views | Oct 16, 2018, 08:30am

AI Requires More Than Machine Learning



Jans Aasman Forbes Councils Member

Forbes Technology Council

COUNCIL POST | Paid Program

Innovation

Researchers: Are we on the cusp of an 'AI winter'?


By Sam Shead

Technology reporter

12 January 2020 | Technology

What Can AI Do?

Sci-Fi AI

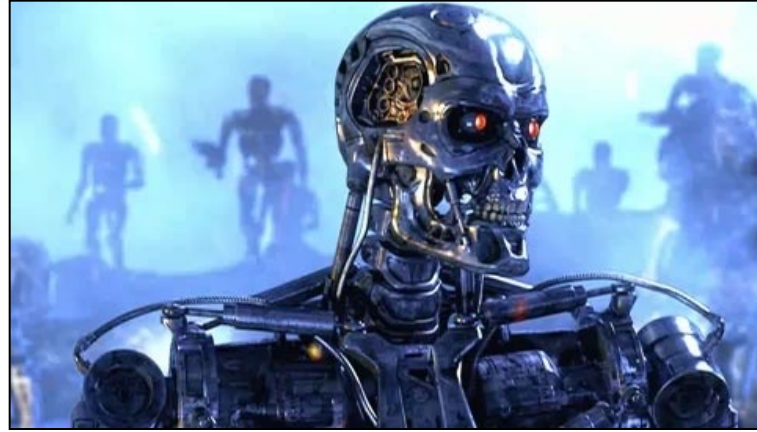

Face recognition, real-time detection




<https://bitrefine.group/home/transportation/face-recognition-support-system>

https://cdn-images-1.medium.com/max/1600/1*q1uVc-MU-tC-WwFp2yXJow.gif


Medical image analysis

- Segmentation results
- Breast Cancer Diagnoses

a

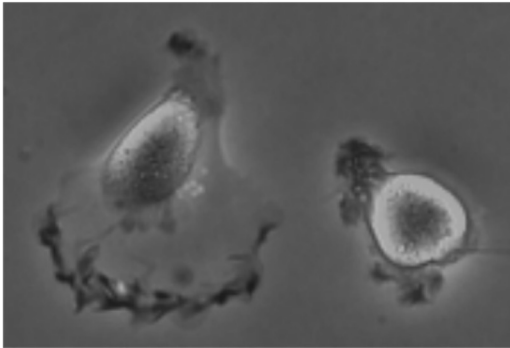

(AI + Pathologist) > Pathologist

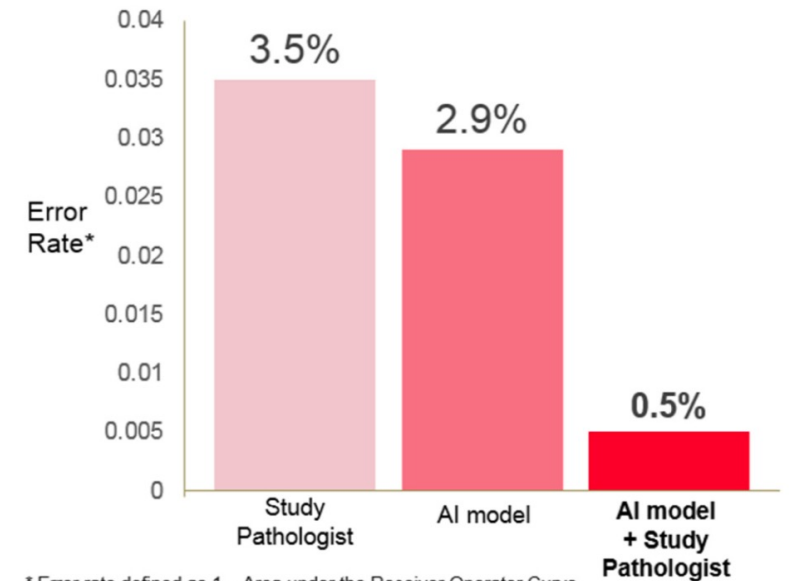

* Error rate defined as 1 - Area under the Receiver Operator Curve


** A study pathologist, blinded to the ground truth diagnoses, independently scored all evaluation slides.

© 2016 PathAI

Ronneberger, O., Fischer, P., and S. S. Segmentation. In *Inter* 234-241). Springer, Cham.

Wang, Dayong, et al. "Deep learning for identifying metastatic breast cancer." arXiv preprint arXiv:1606.05718 (2016).
<https://blogs.nvidia.com/blog/2016/09/19/deep-learning-breast-cancer-diagnosis/>

Voice assistants: Google AI 2018

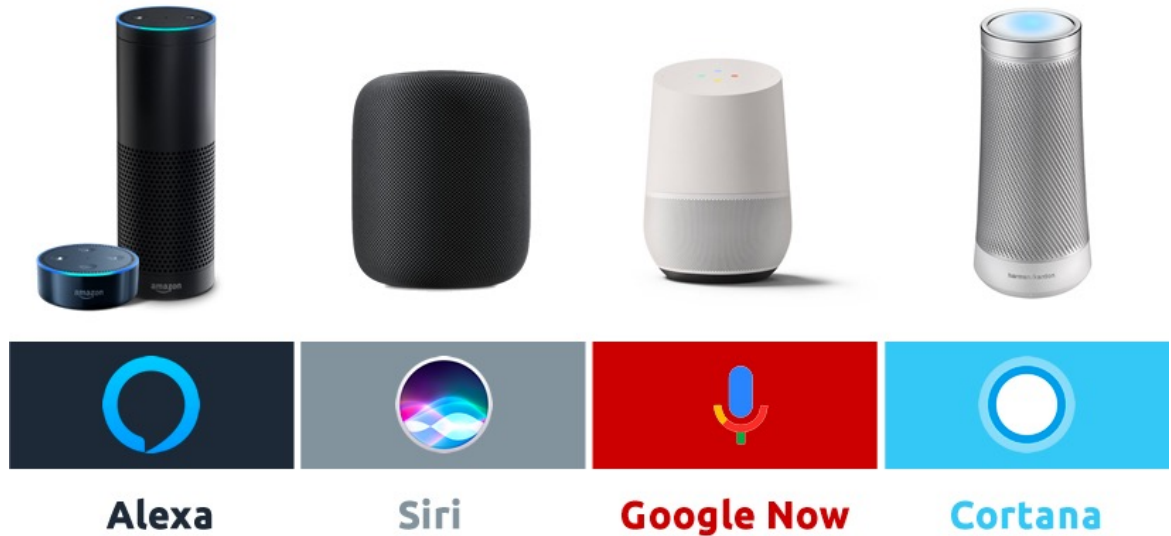



Web app: search, recommendation, ad

The screenshot displays a search interface with the following elements:

- Search Bar:** Contains the text "shanghai jiao tong university".
- Search Results:** A list of results including:
 - shanghai jiao tong university **ranking**
 - shanghai jiao tong university **international students**
 - shanghai jiao tong university **school of medicine**
 - shanghai jiao tong university **admission** (highlighted with a red box)
 - Scholarly articles for shanghai jiao tong univer
 - Shanghai Jiao Tong University - Wang - Cited by 21
 - Shanghai Jiao-Tong University - Xue - Cited by 14
 - Nanosheet-constructed porous TiO2-B for advanced ... - Liu - Cite
 - Shanghai Jiao Tong University
 - en.sjtu.edu.cn/ (with a dropdown arrow)
 - Site Search. Home; About SJTU; Admission; Academics; Resear
 - Rose to No.7 in 2016 Financial Times EMBA Ranking ...
 - Programs in English · Schools · Fall 2016 SJTU Graduate ... · Scl
 - 上海交通大学
 - www.sjtu.edu.cn/ (with a dropdown arrow) Translate this page
 - 全面介绍上海交通大学新闻的网站。
 - Shanghai Jiao Tong University - Wikipedia
 - https://en.wikipedia.org/wiki/Shanghai_Jiao_Tong_Universi
 - Shanghai Jiao Tong University is a public research university loc
 - Established in 1896 by an imperial edict issued by the Guangxu ...
 - Name · History · Academics, enrollment, and staff · Organization
- Recommendation Section:** Titled "Other Movies You Might Enjoy" (circled in green). It features four movie posters:
 - Amélie
 - Y tu mamá también
 - Guys and Balls
 - Mostly MarthaEach poster includes an "Add" button, a star rating, and a "Not Interested" button.
- Notification:** A message stating "Eiken has been added to your Queue at position 2." with a "Move To Top Of My Queue" button.
- Navigation Bar:** Contains links for 天猫 (Tmall), 聚划算 (Juhuasuan), 天猫超市 (Tmall Supermarket), 淘抢购 (Taobao Flash Sale), 电器城 (Appliance City), 司法拍卖 (Judicial Auction), 淘宝心选 (Taobao Heart Selection), and 兴农 (Xingnong).
- Advertisement:** A large banner for "新势力周" (New Force Week) featuring a woman in a purple sweater and a "BUY" bag. Text includes "哎哟! 辣么好看" (Aiyoh! So beautiful) and "时髦新品, 满减200-15" (Fashionable new products, 200-15 off).
- Footer:** Includes the Tmall logo and the slogan "理想生活 上天猫" (Ideal life on Tmall).

Alleviate traffic congestion

- Ride sharing
- Disperse traffic

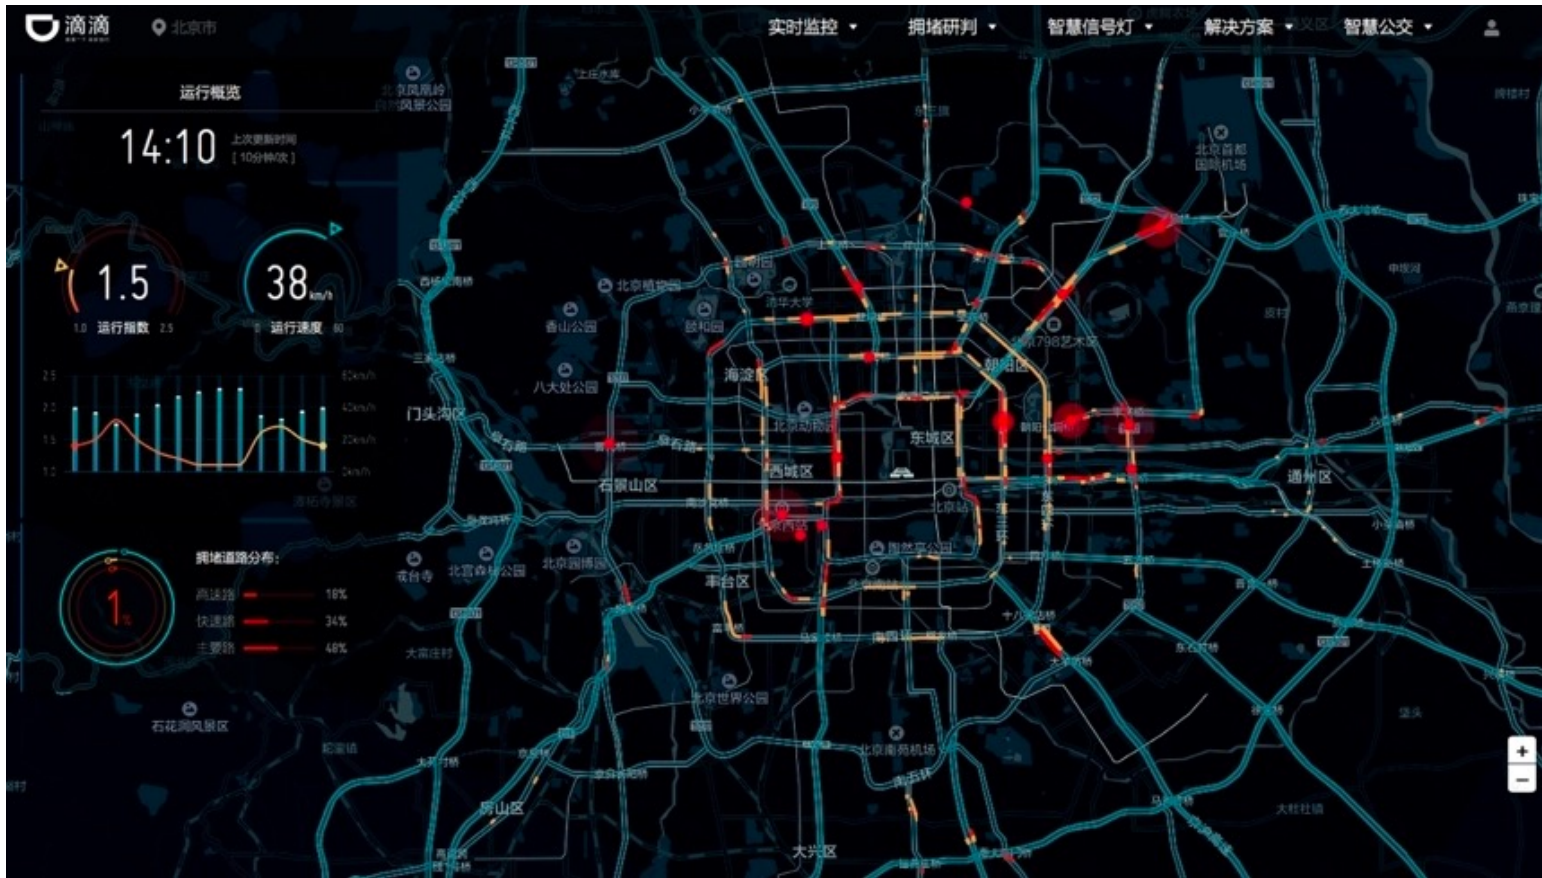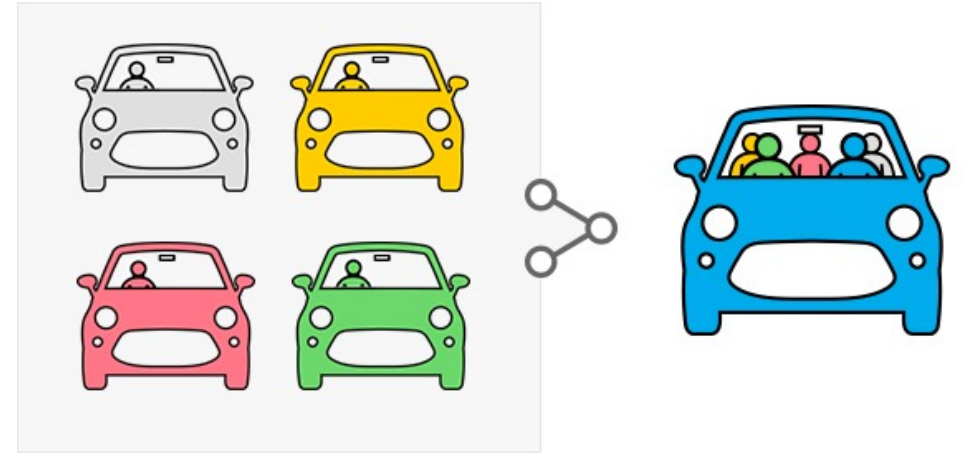

Exoskeletons



Agriculture: Crop-dusting

- DJI drones (unmanned aerial vehicles)



Transportation: Sorting parcels


Boston Dynamics: Atlas | Partners in Parkour



EXPLORER

\$74,500.00

The Spot Explorer kit puts the power of robotics into your hands and makes robotics easy, so you can focus on building your application.

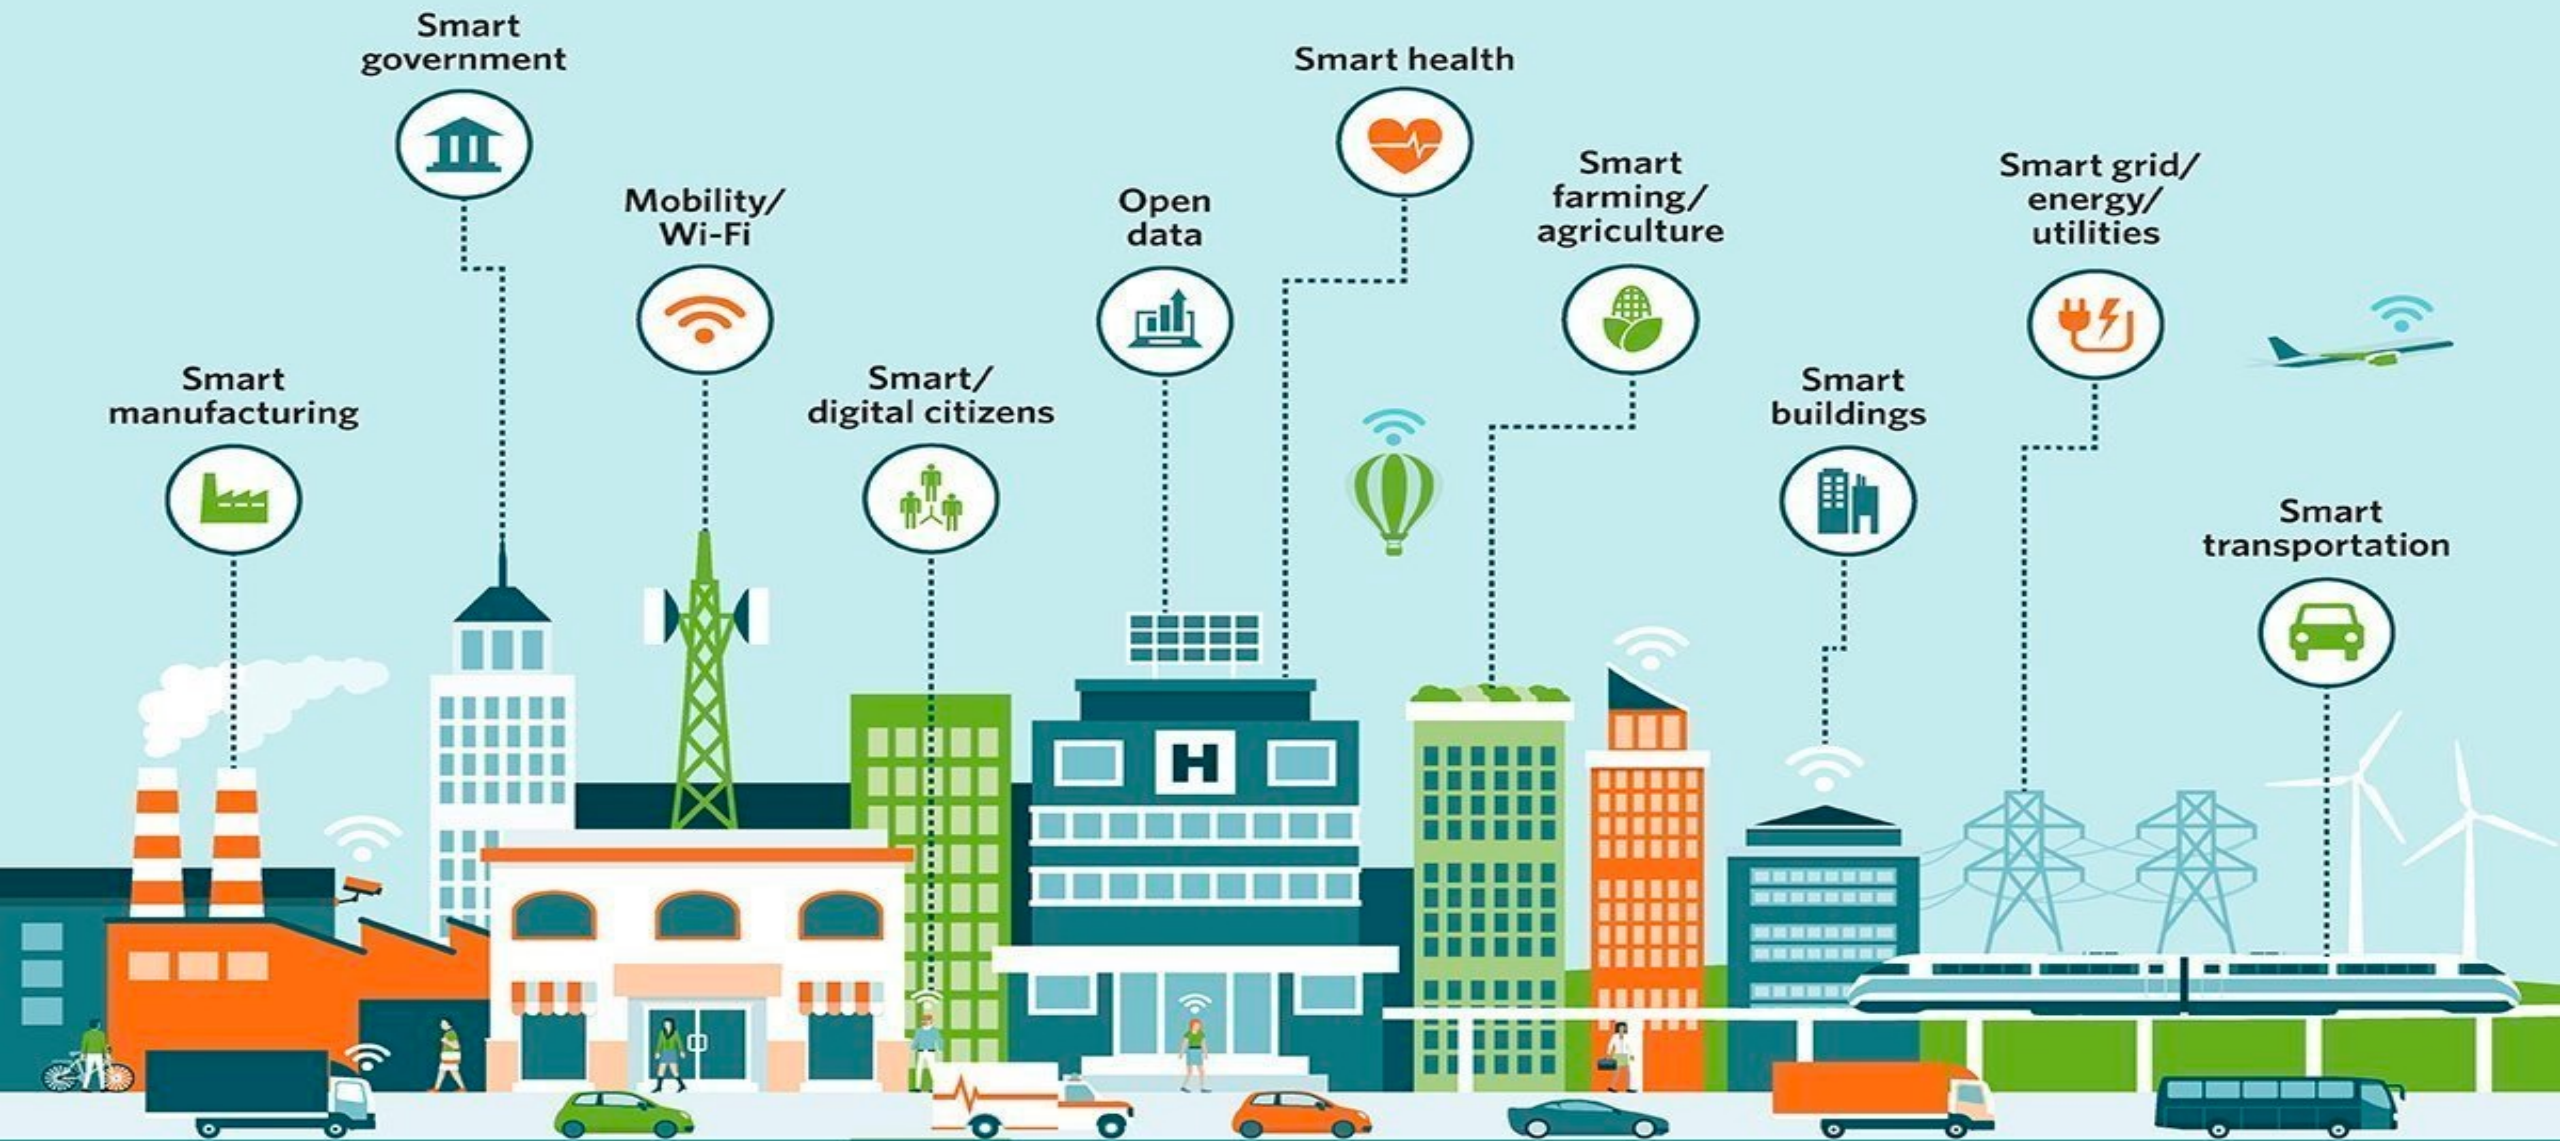


SMART CITY COMPONENTS

What Can AI Do?

Quiz: Which of the following can be done at present?



- ✓ ■ Play a decent game of table tennis?
- ✓ ■ Drive safely along a curving mountain road?
- ? ■ Drive safely across Shanghai?
- ✓ ■ Buy a week's worth of groceries on the web?
- ✗ ■ Buy a week's worth of groceries at a local market?
- ? ■ Discover and prove a new mathematical theorem?
- ✗ ■ Converse successfully with another person for an hour?
- ? ■ Perform a surgical operation?
- ✓ ■ Put away the dishes and fold the laundry?
- ✓ ■ Translate spoken Chinese into spoken English in real time?
- ? ■ Write an intentionally funny story?

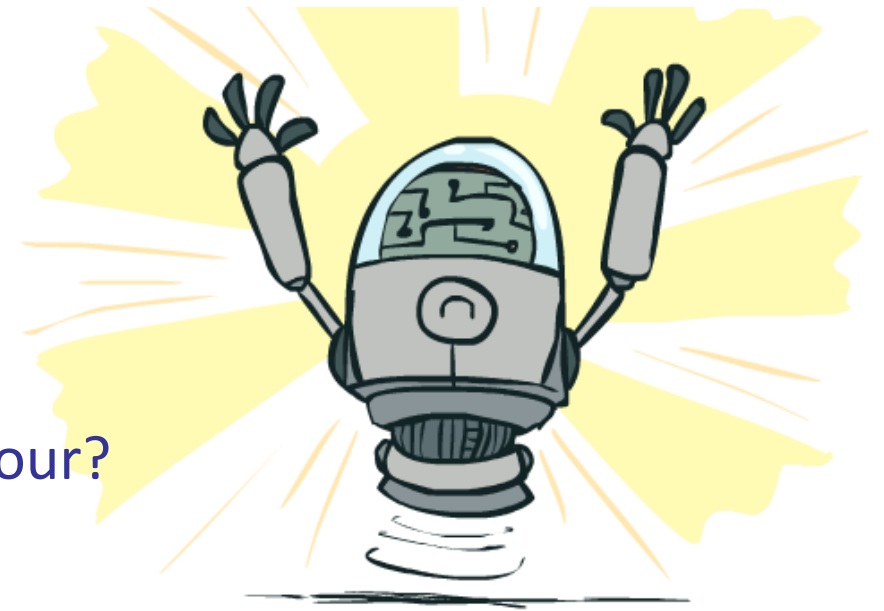



Intelligent Agents

Agents and environments

- Agents interact with environments through sensors and actuators
- An **agent** is an entity that perceives and acts
- A **rational agent** selects actions that maximize its (expected) utility
- Characteristics of the percepts, environment, and action space dictate techniques for selecting rational actions

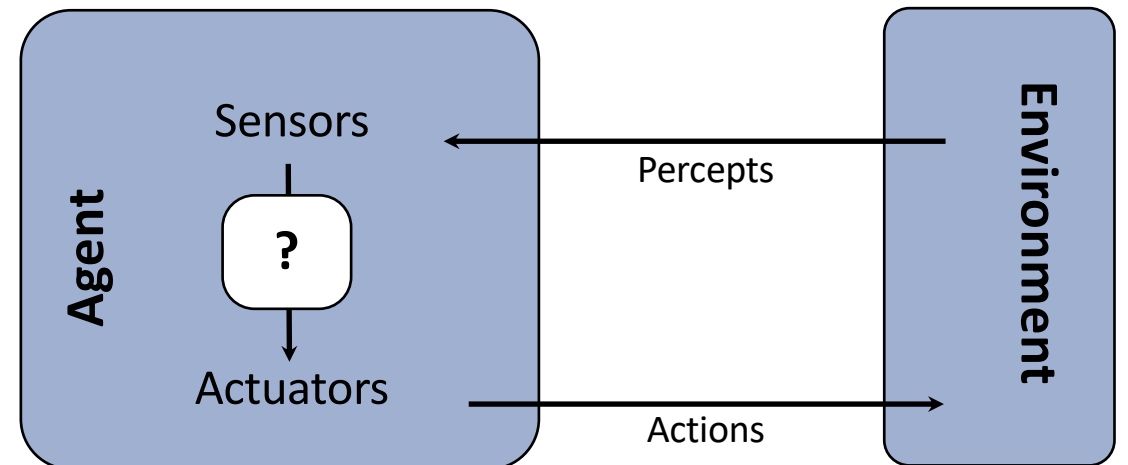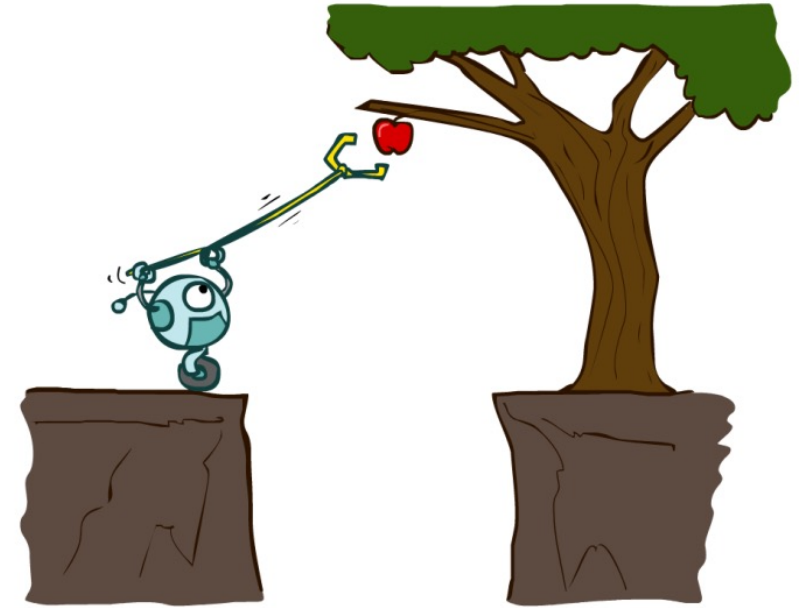


Pac-Man as an Agent

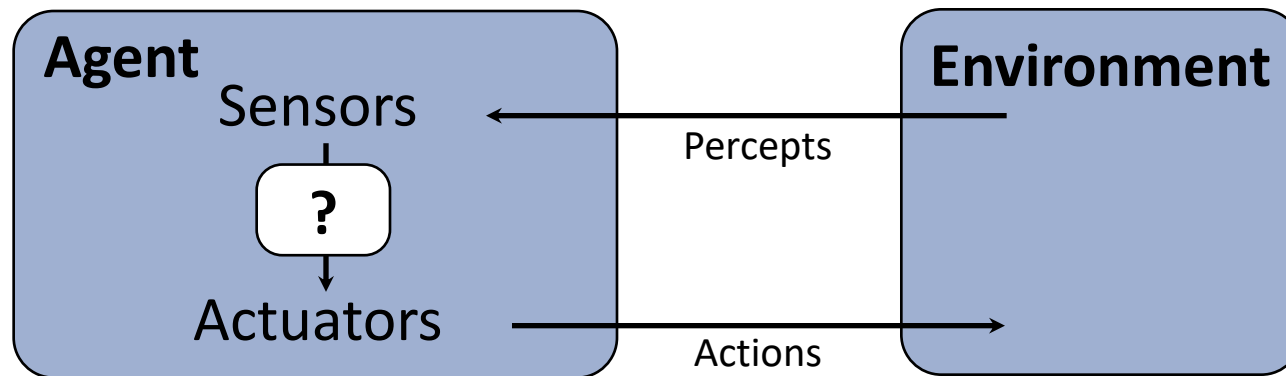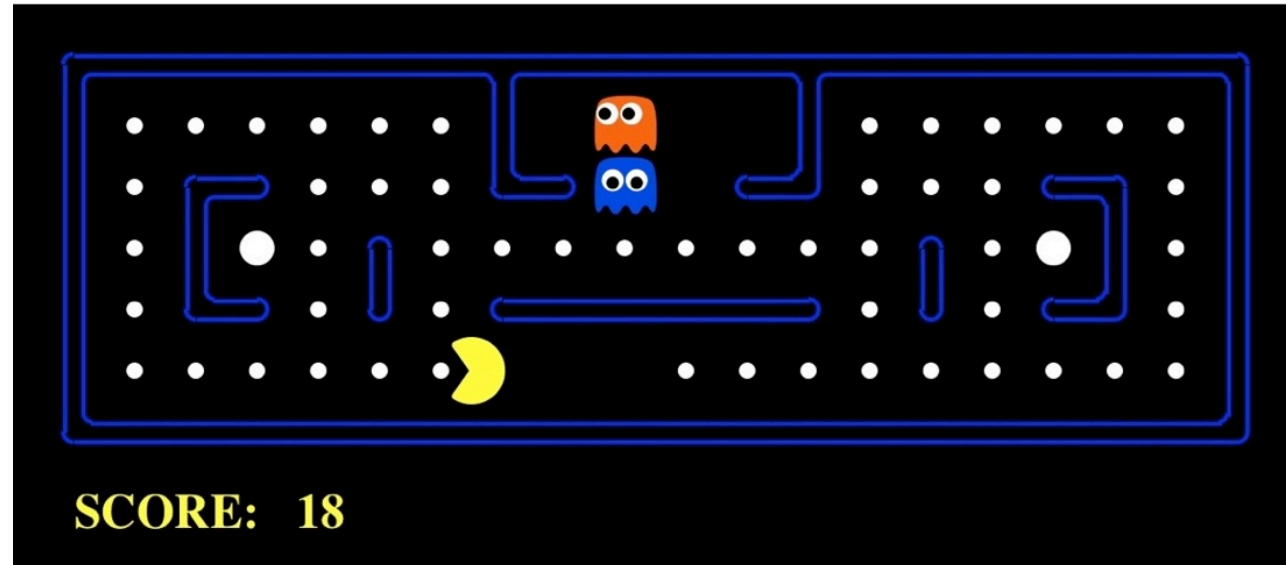

Environment 1: Pac-Man

- Performance measure
 - -1 per step; +10 food; +500 win; -500 die; +200 hit scared ghost
- Environment
 - Pacman dynamics (incl ghost behavior)
- Actuators
 - North, South, East, West, (Stop)
- Sensors
 - Entire state is visible

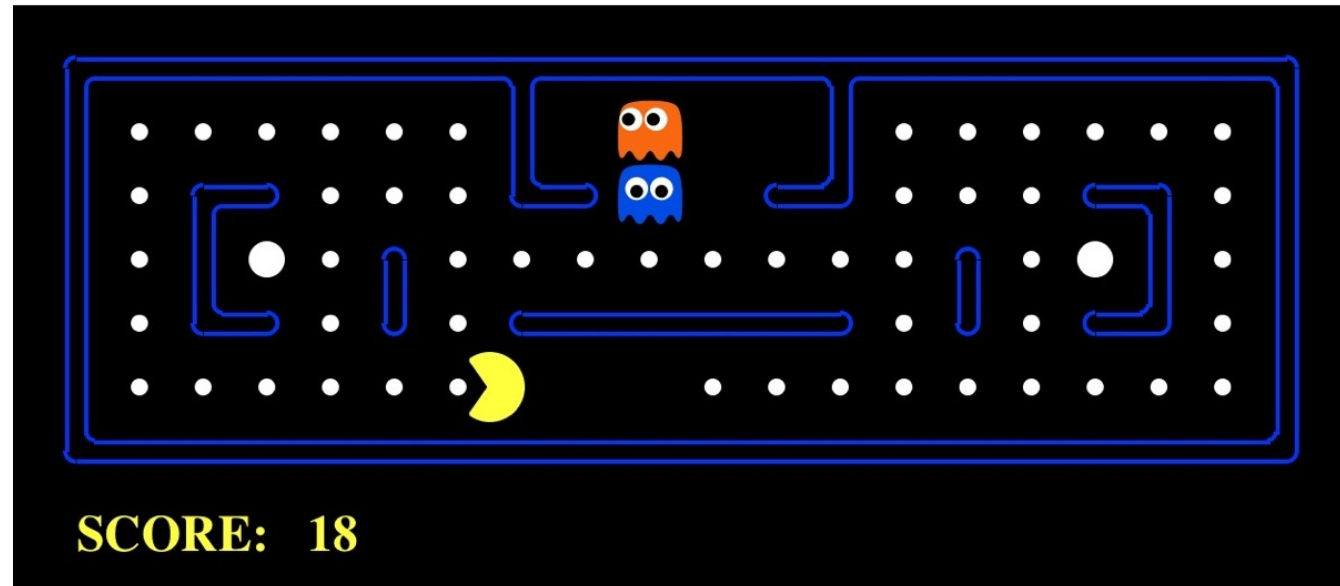

Environment 2: Automated taxi

- Performance measure
 - Income, happy customer, vehicle costs, fines, insurance premiums
- Environment
 - streets, other drivers, customers
- Actuators
 - Steering, brake, gas, display/speaker
- Sensors
 - Camera, radar, accelerometer, engine sensors, microphone





Environment Types

| | Pacman | Taxi |
|-------------------------------|--------|------|
| Fully or partially observable | | |
| Single agent or multi-agent | | |
| Deterministic or stochastic | | |
| Static or dynamic | | |
| Discrete or continuous | | |

(Textbook p44) **Static** vs. **dynamic**: If the environment can change while an agent is deliberating, then we say the environment is dynamic for that agent; otherwise, it is static.

Simple reflex agents

- Reflex agents:
 - Choose action based on current percept (and maybe memory)
 - May have memory or a model of the world's current state
 - Do not consider the future consequences of their actions
 - Consider how the world IS
- Can a reflex agent be rational?

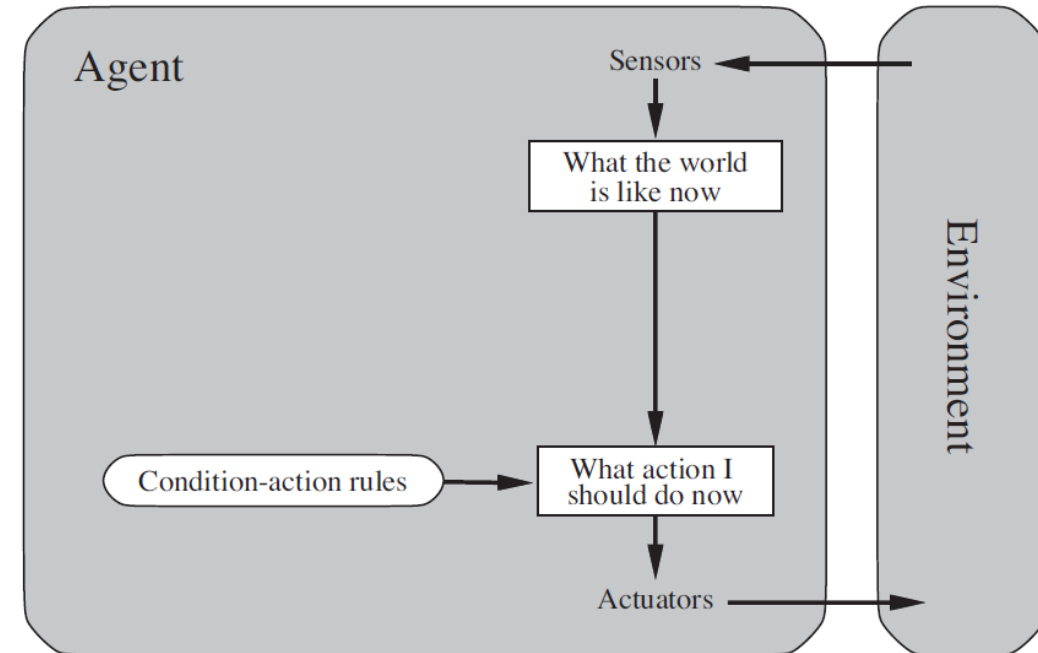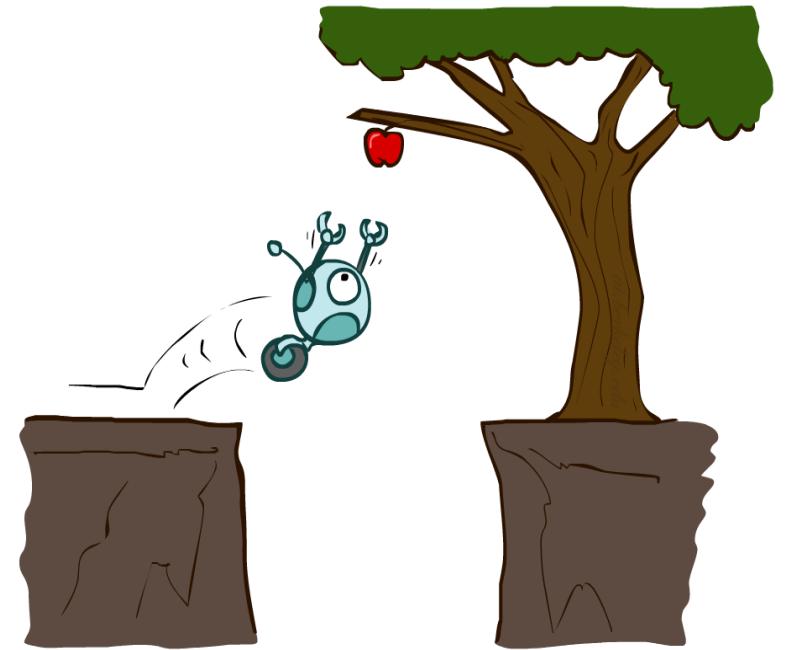

[Demo: reflex optimal (L2D1)]

[Demo: reflex optimal (L2D2)]

Video of Demo Reflex Optimal

Video of Demo Reflex Odd

Summary

- What is AI and ML
- An example of AI but not ML
 - A* algorithm
- Foundation of AI
- History of AI
- What can AI do
 - Many applications in different industries/many aspects of life
- Intelligent agents
 - reflex agents

Shuai Li

<https://shuaili8.github.io>

Questions?